


PAD AREA
 KEEP OUT AREA
RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ± 0.05

Circuit Diagram for Detect Switch









SPECIFICATION

MATERIAL:
 INSULATOR: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0. COLOR: BLACK LCP
 CONTACT: COPPER ALLOY
PLATING:
 CONTACT: PLATED 30U" NI OVERALL
 PLATED AU SELECTIVE CONTACT AREA
 SHELL: PLATED 30U" NI OVERALL, PAD G/F AU
ELECTRICAL:
 CURRENT RATING: 0.5AMPS
 VOLTAGE RATING: 5V AC/DC
 AMBIENT TEMPERATURE RANGE: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
 AMBIENT HUMIDITY RANGE: 95% R.H. MAX.
 CONTACT RESISTANCE: 100M Ω MAX.
 INSULATION RESISTANCE: 1000M Ω MIN./500VDC
 MATING CYCLES: 5,000 INSERTIONS
 REFLOW PEAK TEMP: 260 $^{\circ}\text{C}$

MINI SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
C4/C8	N/A
SW1	DETECTION SWITCH1
SW2	DETECTION SWITCH2

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: MINI SIM CARD PUSH PUSH 6P+2P SMT无柱 PAR SIM-117-ARP8	
DECIMALS:	ANGLES: $\pm 1^{\circ}$	DWN	
X.X: ± 0.25		CHKD	
X.XX: ± 0.10		APVD	
X.XXX: ± 0.05		SCALE 1:1	UNIT: MM
		CUSTOMER COPY	SIZE: A4
			SHEET: 1F1
			REV: A

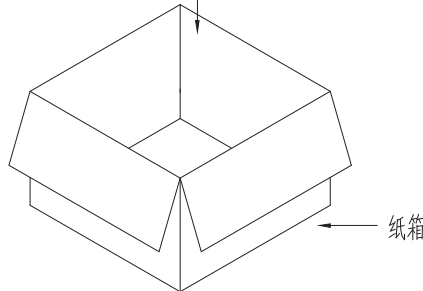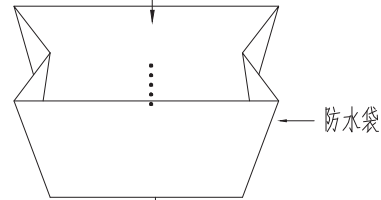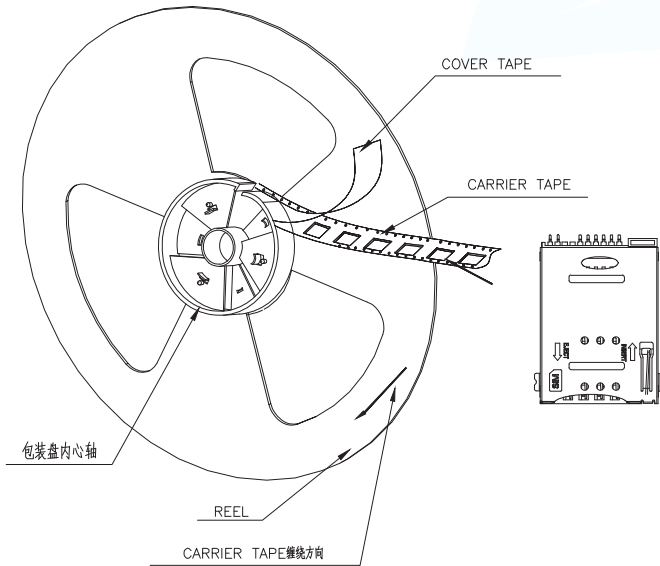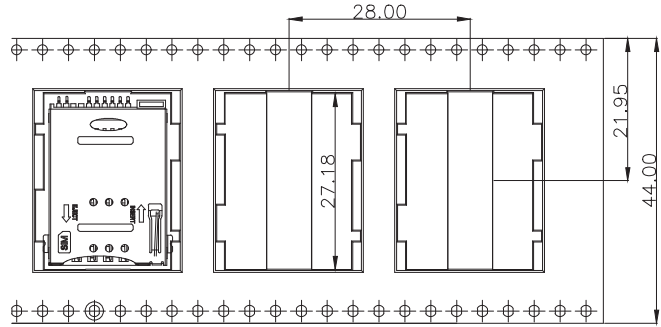

- 一：
- 1.将成品一一放入包装盘内,依同一方向放入
 - 2.包装时,如图所示.
 - 3.一个包装然放置700个成品
- 二：
- 1.一只纸箱可放置3个或5个包装盘
 - 2.一只纸箱可放2100PCS或4200PCS的成品
 - 3.将成品放入包装盘内包装完后再装箱

Note: PULL OUT DIRECTION

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is within 1 mm in 250mm.
- 3.Material:Black Conductive Polystyrene Alloy 100
- 4.All dimensions meet EIA-481-B requirements.
- 5.Thickness: 0.3 ± 0.05 mm.
- 6.Component load per 13" reel: 700 pcs.
7. A box of 3 volumes, 2100PCS
8. 纸箱规格一: 345*345*165, 纸箱重为300g, (一箱装2100PCS)
9. 纸箱规格二: 345*345*315, 纸箱重为500g, (一箱装4200PCS)
10. 重量: 每盘700PCS重1470g, 每Pcs重1.3g/Pcs

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:MINI SIM CARD PUSH PUSH 6P+2P SMT无柱 包装图
			PAR SIM-117-ARP8
DECIMALS:	ANGLES: $\pm 1^\circ$		DWN
X.X: ± 0.25			CHKD
X.XX: ± 0.10			APVD
X.XXX: ± 0.05		SCALE 1:1 UNIT:MM	
		CUSTOMER COPY	SIZE:A4 SHEET:1F1 REV:A