

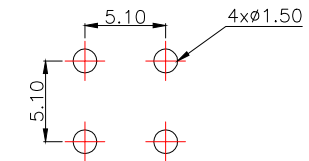
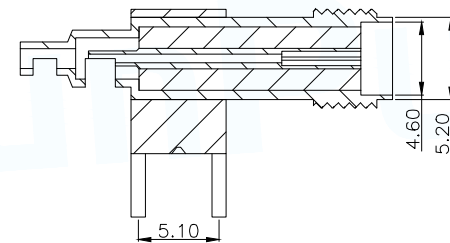
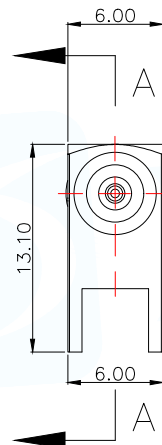


Technical requirements	
Characteristic impedance	50Ω
Frequency range	0-6GHZ
Contact resistance	
Inner conductor	≤3mΩ
Outer conductor	≤2mΩ
Insulated resistance	≥5000MΩ
Salt spray time	48H
Separation force	≥0.28N
Appearance: no shift point burr scratch surface bright, no dirt, no deformation, etc	

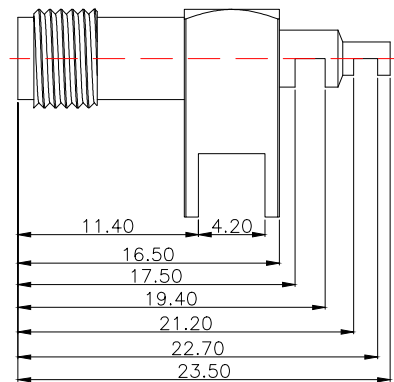

PCB.WELDING DRAWING (TOLERANCE:±0.05)

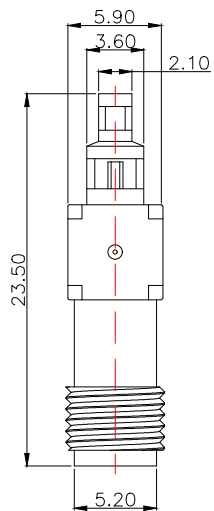

1	铜座	1	黄铜	镀金
2	铜套	1	黄铜	镀金
3	绝缘体	1	PTFE	
4	母针	1	黄铜	镀金
5	尾塞	1	黄铜	镀金
序号	名称	数量	材料	备注

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES



TITLE: SMA系列

PAR SMA-C-KWE-624-H16.5

DECIMALS: ANGLES:

X.X±0.30 X.*±5°

X.XX±0.25 X.X*±1°

X.XXX±0.15

DWN

CHKD

APVD

SCALE:A UNIT:MM

SIZE:A4 SHEET:1F1



REV:A