


-, MATERIAL:

1. Insulator: PBT+30%Glass Fiber
2. Contact: Brass
3. Contact Plated: Gold Flash over Tin Or Glod Plated Or Tin Plated
4. Shell: Steel, Nickel Plated

≡, SPECIFICATION:

1. Current Rating: 3 AMPS
2. Insulation Resistance: 100M $\Omega$  MIN. At 500VDC
3. Dielectric Strength: 500V for One minute
4. Operation Temperature:  $-55^{\circ}$  C ~  $+105^{\circ}$  C.

✳【胶芯颜色、防火要求、环保要求及电镀规格 依据客户实际订单要求为准】

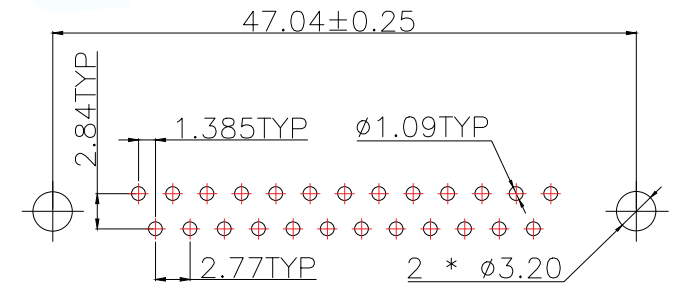

RECOMMEND PCB LAYOUT (T=1.6)  
 PCB TOLERANCE:  $\pm 0.05$

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: DR25F双锁
			PAR D-SUB-DR-25PCM-BB
DECIMALS:	ANGLES:		DWN
X.X $\pm$ 0.30	X. $^{\circ}$ $\pm$ 5'		CHKD
X.XX $\pm$ 0.25	X.X' $\pm$ 2"	APVD	SCALE N:A
X.XXX $\pm$ 0.15	X.XX' $\pm$ 1"	CUSTOMER COPY	UNIT:MM
		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A