


Technical requirements	
Characteristic impedance	50Ω
Frequency range	0-6GHZ
Contact resistance	
Inner conductor	≤3mΩ
Outer conductor	≤2mΩ
Insulated resistance	≥5000MΩ
Salt spray time	48H
Separation force	≥0.28N
Appearance: no shift point burr scratch surface bright, no dirt, no deformation, etc	

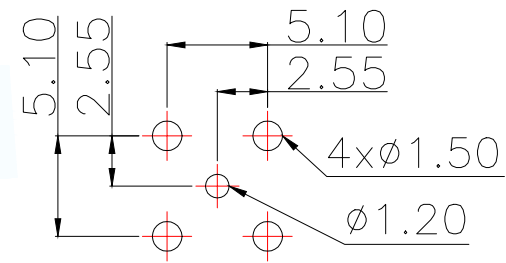

PCB.WELDING DRAWING (TOLERANCE:±0.05)

序号	名称	数量	材料	备注
1	铜壳	1	黄铜	镀金
2	铜针	1	黄铜	镀金
3	绝缘体	2	PTFE	
4	铜座	1	黄铜	镀金

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 弯头-半螺内孔-H15*16.8-LW
DECIMALS:	ANGLES:		PAR SMA-KWE-362-H15*16.8-LW
X.X±0.30	X.*±5°		DWN
X.XX±0.25	X.X*±1°		CHKD
X.XXX±0.15		APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A