
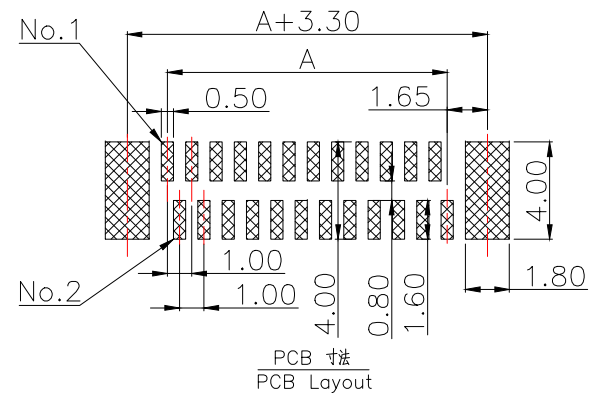
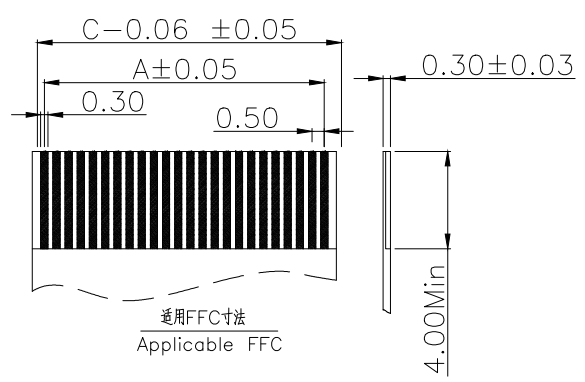
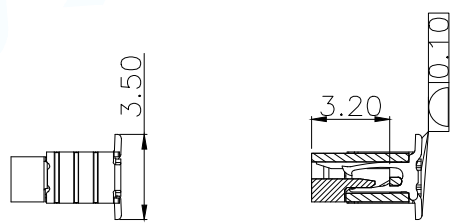
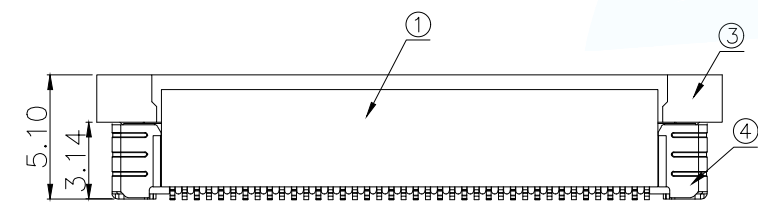
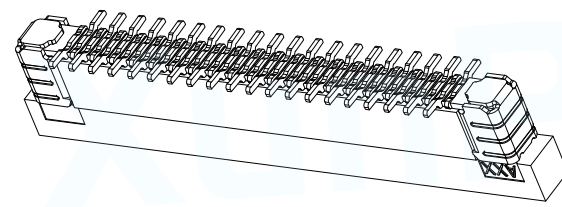
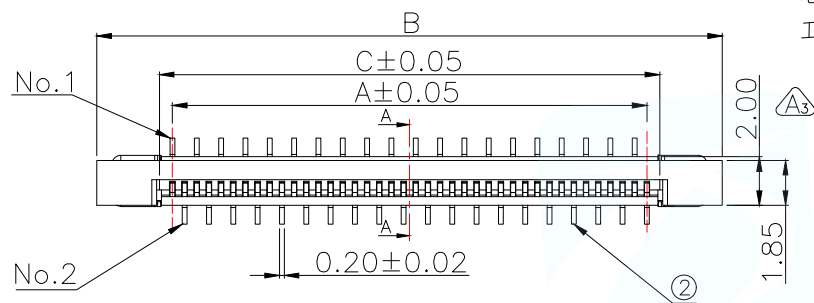


4	0.5拉拔3代焊片(H2.0)	铜合金/表面镀锡
3	0.5拉拔卧式3代后盖(H2.0)	LCP UL94V-0 黑色
2	0.5拉拔立式端子	铜合金/表面镀锡
1	0.5拉拔3代胶芯(H2.0)	LCP UL94V-0 本色
序号	品名	材料规格

NOTES:  
 额定电流 Current rating: 0.5A  
 额定电压 Voltage rating: 50V  
 耐电压 Withstand voltage: 500V AC/minute  
 接触电阻 Contact resistance : $\leq 0.03\Omega$   
 绝缘电阻 Insulation resistance:  $\geq 500M\Omega$  MIN  
 工作温度 Working temperature:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Part No	Pin	A	B	C
FPC-0.5ALF-4PB	4	1.50	7.70	2.56
FPC-0.5ALF-5PB	5	2.00	8.20	3.06
FPC-0.5ALF-6PB	6	2.50	8.70	3.56
FPC-0.5ALF-7PB	7	3.00	9.20	4.06
FPC-0.5ALF-8PB	8	3.50	9.70	4.56
FPC-0.5ALF-9PB	9	4.00	10.20	5.06
FPC-0.5ALF-10PB	10	4.50	10.70	5.56
FPC-0.5ALF-11PB	11	5.00	11.20	6.06
FPC-0.5ALF-12PB	12	5.50	11.70	6.56
FPC-0.5ALF-13PB	13	6.00	12.20	7.06
FPC-0.5ALF-14PB	14	6.50	12.70	7.56
FPC-0.5ALF-15PB	15	7.00	13.20	8.06
FPC-0.5ALF-16PB	16	7.50	13.70	8.56
FPC-0.5ALF-17PB	17	8.00	14.20	9.06
FPC-0.5ALF-18PB	18	8.50	14.70	9.56
FPC-0.5ALF-19PB	19	9.00	15.20	10.06
FPC-0.5ALF-20PB	20	9.50	15.70	10.56
FPC-0.5ALF-21PB	21	10.00	16.20	11.06
FPC-0.5ALF-22PB	22	10.50	16.70	11.56
FPC-0.5ALF-23PB	23	11.00	17.20	12.06
FPC-0.5ALF-24PB	24	11.50	17.70	12.56
FPC-0.5ALF-25PB	25	12.00	18.20	13.06
FPC-0.5ALF-26PB	26	12.50	18.70	13.56
FPC-0.5ALF-27PB	27	13.00	19.20	14.06
FPC-0.5ALF-28PB	28	13.50	19.70	14.56
FPC-0.5ALF-29PB	29	14.00	20.20	15.06
FPC-0.5ALF-30PB	30	14.50	20.70	15.56
FPC-0.5ALF-31PB	31	15.00	21.20	16.06
FPC-0.5ALF-32PB	32	15.50	21.70	16.56
FPC-0.5ALF-33PB	33	16.00	22.20	17.06
FPC-0.5ALF-34PB	34	16.50	22.70	17.56
FPC-0.5ALF-35PB	35	17.00	23.20	18.06







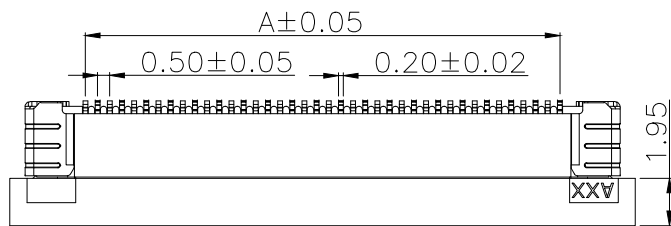


MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 0.5 Pitch 拉拔立式3代后盖1代
DECIMALS:	ANGLES:		PAR FPC-0.5ALF-NPB
.X:±0.38	.X':±5°		DWN
.XX:±0.20	.XX':±3°		CHKD
.XXX:±0.05	.XXX':±1°	APVD	SCALE:1:1 UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1
			REV:A

4	0.5拉拔3代焊片(H2.0)	铜合金/表面镀锡
3	0.5拉拔卧式3代后盖(H2.0)	LCP UL94V-0 黑色
2	0.5拉拔立式端子	铜合金/表面镀锡
1	0.5拉拔3代胶芯(H2.0)	LCP UL94V-0 本色
序号	品名	材料规格

NOTES:  
 额定电流 Current rating: 0.5A  
 额定电压 Voltage rating: 50V  
 耐电压 Withstand voltage: 500V AC/minute  
 接触电阻 Contact resistance :≤0.03Ω  
 绝缘电阻 Insulation resistance: >500MΩ MIN  
 工作温度 Working temperature: -25℃ ~ +85℃

Part No	Pin	A	B	C
FPC-0.5ALF-36PB	36	17.50	23.70	18.56
FPC-0.5ALF-37PB	37	18.00	24.20	19.06
FPC-0.5ALF-38PB	38	18.50	24.70	19.56
FPC-0.5ALF-39PB	39	19.00	25.20	20.06
FPC-0.5ALF-40PB	40	19.50	25.70	20.56
FPC-0.5ALF-41PB	41	20.00	26.20	21.06
FPC-0.5ALF-42PB	42	20.50	26.70	21.56
FPC-0.5ALF-43PB	43	21.00	27.20	22.06
FPC-0.5ALF-44PB	44	21.50	27.70	22.56
FPC-0.5ALF-45PB	45	22.00	28.20	23.06
FPC-0.5ALF-46PB	46	22.50	28.70	23.56
FPC-0.5ALF-47PB	47	23.00	29.20	24.06
FPC-0.5ALF-48PB	48	23.50	29.70	24.56
FPC-0.5ALF-49PB	49	24.00	30.20	25.06
FPC-0.5ALF-50PB	50	24.50	30.70	25.56
FPC-0.5ALF-51PB	51	25.00	31.20	26.06
FPC-0.5ALF-52PB	52	25.50	31.70	26.56
FPC-0.5ALF-53PB	53	26.00	32.20	27.06
FPC-0.5ALF-54PB	54	26.50	32.70	27.56
FPC-0.5ALF-55PB	55	27.00	33.20	28.06
FPC-0.5ALF-56PB	56	27.50	33.70	28.56
FPC-0.5ALF-57PB	57	28.00	34.20	29.06
FPC-0.5ALF-58PB	58	28.50	34.70	29.56
FPC-0.5ALF-59PB	59	29.00	35.20	30.06
FPC-0.5ALF-60PB	60	29.50	35.70	30.56

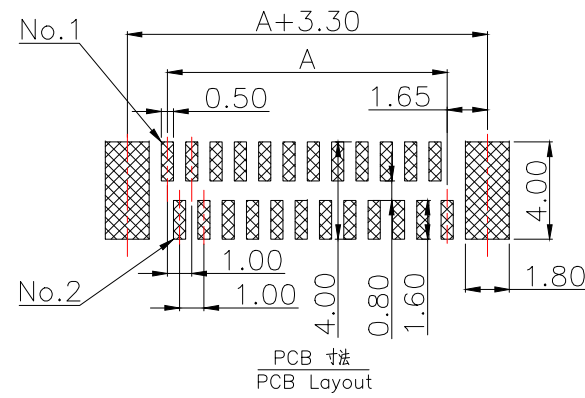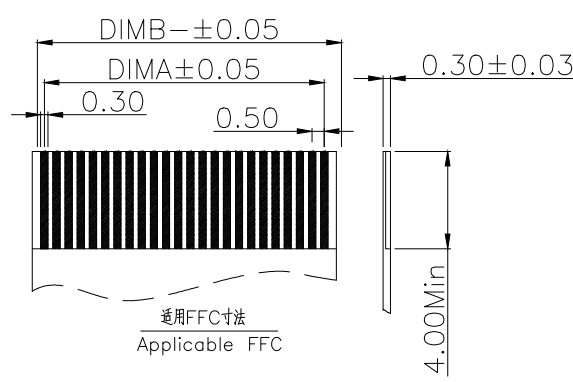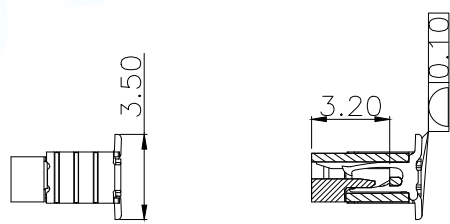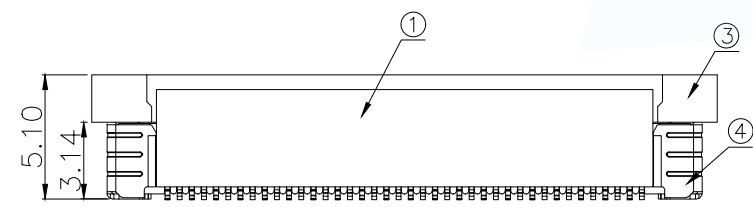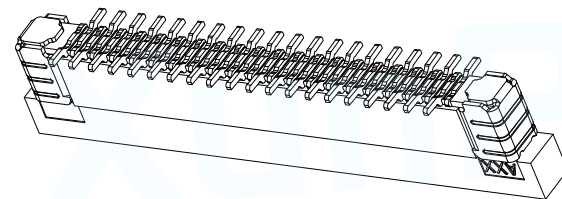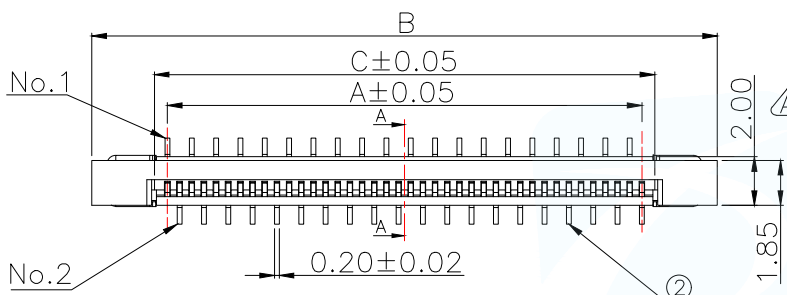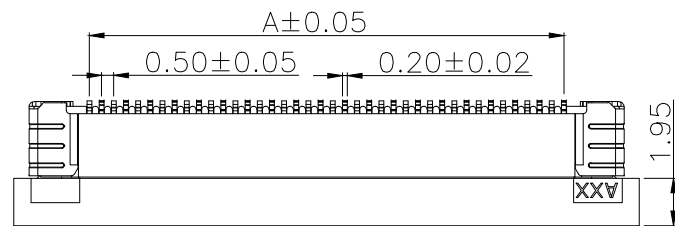

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 0.5 Pitch 拉拔立式3代反脚位1代
DECIMALS:	ANGLES:		PAR FPC-0.5ALF-NPB
.X:±0.38	.X':±5°		DWN
.XX:±0.20	.XX':±3°		CHKD
.XXX:±0.05	.XXX':±1°	APVD	SCALE:1:1 UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A