



SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000MΩ, Min
 Contact Resistance: 20mΩ, Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40°to+105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester(UL 94V-0)
 Contact Plating: Gold Flash
 Max.Processing Temp: 240°C for30-60seconds
 (260°C for5seconds)


| P/N | PIN | DIM.A | DIM.B |
|-----------------|------|----------|-------|
| IDC2.0-01-03PZS | 2*3 | 4.00 | 6.00 |
| IDC2.0-01-04PZS | 2*4 | 6.00 | 8.00 |
| IDC2.0-01-05PZS | 2*5 | 8.00 | 10.00 |
| IDC2.0-01-06PZS | 2*6 | 10.00 | 12.00 |
| IDC2.0-01-07PZS | 2*7 | 12.00 | 14.00 |
| IDC2.0-01-08PZS | 2*8 | 14.00 | 16.00 |
| IDC2.0-01-09PZS | 2*9 | 16.00 | 18.00 |
| IDC2.0-01-10PZS | 2*10 | 18.00 | 20.00 |
| IDC2.0-01-11PZS | 2*11 | 20.00 | 22.00 |
| | | | |
| IDC2.0-01-35PZS | 2*35 | PIN-2.00 | PIN |

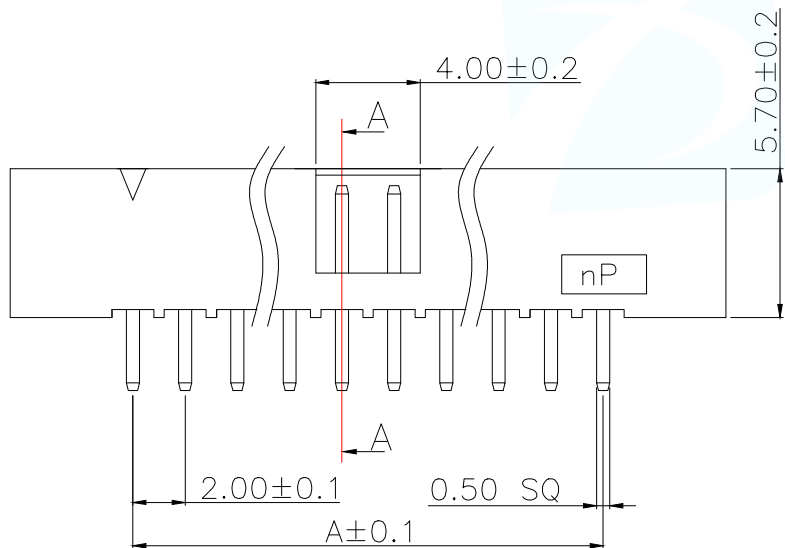

PART NUMBER DESCRIPTION:

IDC2.0-01-NPZS

(D=单排;S=双排)
 (Z=直脚;W=弯脚)
 (PIN数量;06.....70PIN)
 (排针开关)

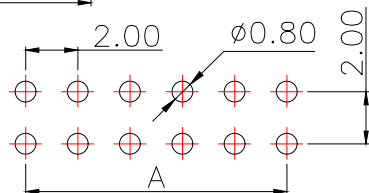

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

| | | | |
|---------------------------------------|------------|---|--|
| MANUFACTURE DWG | | 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | TITLE:2.0DC3-nPin H5.7 180度 PC2.8 L8.0 6T |
| DECIMALS: | ANGLES: | | PAR IDC2.0-01-NPZS |
| X.±0.30 | X°±5' | DWN | CHKD |
| X.X±0.20 | X.X°±1' | APVD | SCALE N:A UNIT:MM |
| X.XX±0.10 | X.XX°±0.5' | CUSTOMER COPY | SIZE:A4 SHEET:1F1 REV:A |