

NOTES


MATERIAL  
 1.HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.  
 2.CONTACT MATERIAL: PHOSPHOR BRONZE  $\phi 0.46\text{mm}$ .  
 3.PLATING: GOLD PLATING OVER NICKEL.

ELECTRICAL  
 1.VOLTAGE RATING: 125 VAC RMS.  
 2.CURRENT RATING: 1.5 AMP.  
 3.CONTACT RESISTANCE: 40 MILLIOHMS MAX.  
 4.INSULATION RESISTANCE: 500 MEGOHMS MIN @ 100V DC  
 5.DIELECTRIC DIELECTRIC RESISTANCE: 500V DC RMS 50Hz. 1MIN.

MECHANICAL  
 1.DURRABILITY: 750 CYCLES MIN.  
 2. MATING/UNMATING FORC: 2.24 KG.F MAX.

ENVIRONMENTAL:  
 1.OPERATION:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .  
 2.STORAGE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .

8	///
7	///
6	RX-
5	///
4	///
3	RX+
2	TX-
1	TX+
PIN	说明

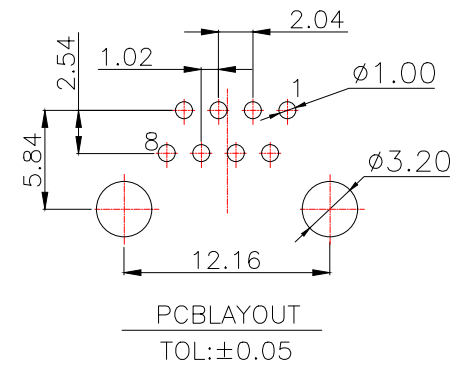

PART NUMBER DESCRIPTION:

RJ45-206-051-0X

- 流水码
- 01:PBT黑 GF盘装
  - 02:PBT黄0407 GF盘装
  - 03:PBT蓝0604 GF盘装
  - 04:PA9T蓝0602 GF盘装
  - 05:PBT灰0805 GF盘装

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: RJ45 1x1 B款 全塑 DIP
DECIMALS:	ANGLES:		PAR RJ45-206-051-11
.X:±0.35	X':±3'		DWN
.XX:±0.25	.X':±2'		CHKD
.XXX:±0.15	.XX':±1'	APVD	SCALE:1:1 UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A