
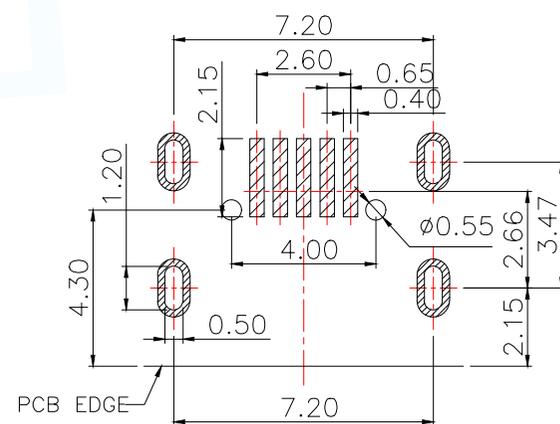


SECTION
A-A


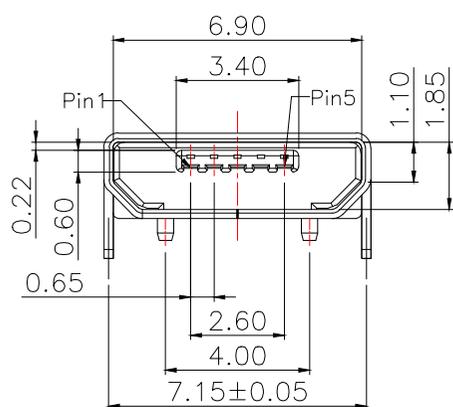


RECOMMENDED PCB LAYOUT
PCB图仅供参考

说明:

- 1.胶芯:LCP 黑色;UL94V-0.
- 2.端子:C2680 T=0.15mm,半金镍G/F (功能区)
- 3.外壳:SUS T=0.25mm,镀镍
- 4.额定电流:1A最大.
- 5.耐电压:100V(AC)/1分钟 至少.
- 6.接触阻抗:50mΩ最大.
- 7.绝缘阻抗:100MΩ最小.
- 8.插入力:3.57Kgf最大.
- 9.拔出力:1.0Kgf初始最小;测试后0.81Kgf最小
- 10.温度范围:-30°C~+80°C

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:Micro usb 5P B 7.2有焊脚有柱	
DECIMALS:	ANGLES:		PAR MU-105-ACW	
X.X±0.30	X.*±5°		DWN	CHKD
X.XX±0.25	X.X*±1°		APVD	SCALE N:A UNIT:MM
X.XXX±0.15		CUSTOMER COPY	SIZE:A4 SHEET:1F1 REV:A	

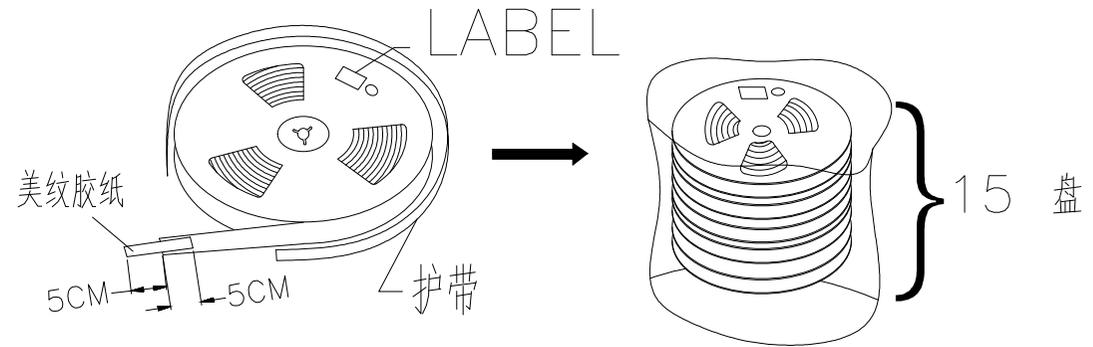
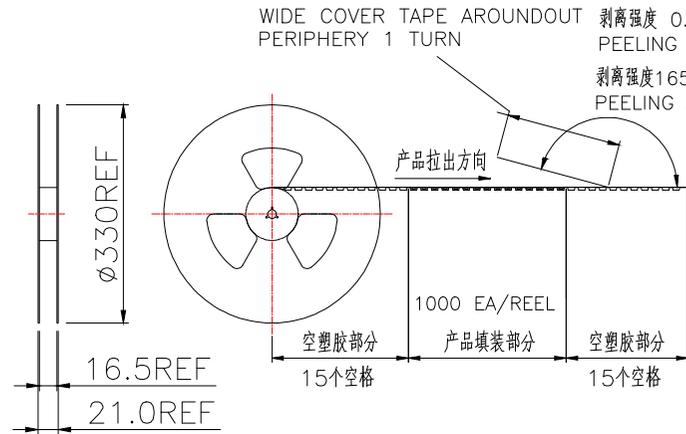


说明:

- 1, 将检查合格的产品, 放入承载带中, 一盘包装1KPCS;
- 2, 将15盘承载带放入纸箱中;
- 3, 将纸箱封装好, 贴上标签, 每箱装15R.

说明:

- 1, 将检查合格的产品, 放入承载带中, 一盘包装1000PCS
- 2, 将15盘承载带放入纸箱中
- 3, 将纸箱封装好, 贴上标签, 每箱装15R.

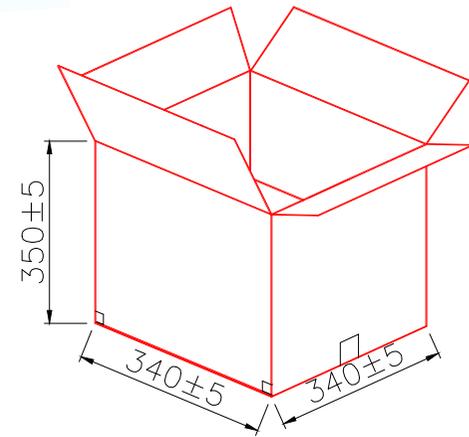

每箱数量	净重(kg)	毛重(kg)
15000PCS	xxx	xxx

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: Micro usb 5P B 7.2有焊脚在柱
DECIMALS:	ANGLES:		PAR MU-105-ACW
X.X±0.30	X.*±5°		DWN
X.XX±0.25	X.X*±1°		CHKD
X.XXX±0.15		APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A