

PART NUMBER DESCRIPTION:

RJ45-005-0XX-XX

- 电镀码
- 1-GOLD FLASH
- 3-3u''Au
- 流水码
- 1:LCP黑 盘装
- 2:LCP黑 卷装
- 类别码
- 12:4.3 全包 左黄右绿
- 13:4.3 全包 左绿右黄
- 14:4.3 全包 左琥珀右绿

NOTES

MATERIAL



- 1.HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
  - 2.CONTACT MATERIAL: COPPER ALLOY T=0.25MM.
  - 3.PLATING: GOLD PLATING ON CONTACT AREA AND MATTE TIN PLATING ON SOLDER AREA OVER NICKEL.
  - 4.SHIELD: SUS T=0.20mm WITH NICKEL PLATED.
  - 5.BOTTOM SHIELD: SUS T=0.15mm .
- ELECTRICAL
- 1.VOLTAGE RATING: 125 VAC RMS.
  - 2.CURRENT RATING: 1.5 AMP.
  - 3.CONTACT RESISTANCE: 40 MILLIOHMS MAX.
  - 4.INSULATION RESISTANCE: 500 MEGOHMS MIN @ 100V DC .
  - 5.DIELECTRIC DIELECTRIC RESISTANCE: 500V DC RMS 50Hz. 1MIN.

MECHANICAL

- 1.DURRABILITY: 750 CYCLES MIN.
- 2.MATING/UNMATING FORCE: 2.24 KG.F MAX.

ENVIRONMENTAL:

- 1.STORAGE: -40℃~+85℃.
- 2.OPERATION: -40℃~+85℃.

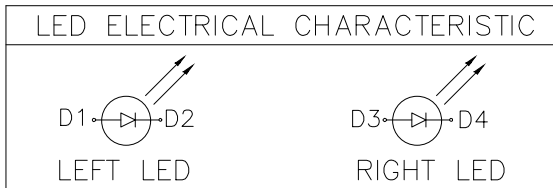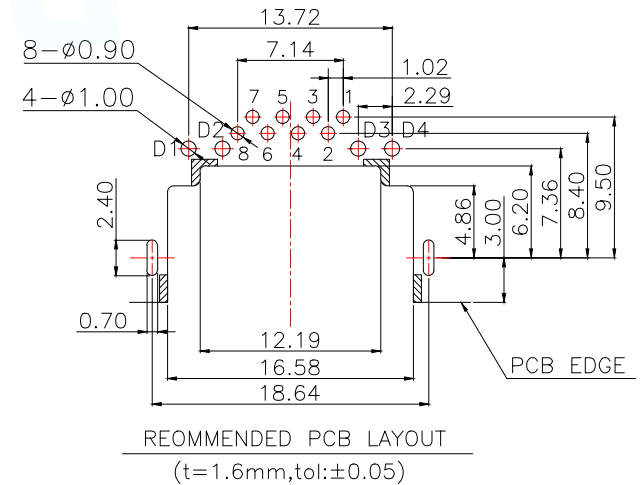

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: RJ45 9.9H沉板4.3全包18.64虎脚带灯	
		PAR	RJ45-005-014-11
DECIMALS:		DWN	
ANGLES:		CHKD	
.X:±0.35	X':±3'	APVD	
.XX:±0.25	.X':±2'	SCALE:1:1	UNIT:MM
.XXX:±0.15	.XX':±1'	SIZE:A4	SHEET:1F1
CUSTOMER COPY			REV:A