



Part No	Pin	A	B	C
WAFER-PHB2.0-4PZZ-1W62	2*2	2.0	6.0	3.2
WAFER-PHB2.0-6PZZ-1W62	2*3	4.0	8.0	3.2
WAFER-PHB2.0-8PZZ-1W62	2*4	6.0	10.0	3.0
WAFER-PHB2.0-10PZZ-1W62	2*5	8.0	12.0	5.0
WAFER-PHB2.0-12PZZ-1W62	2*6	10.0	14.0	7.0
WAFER-PHB2.0-14PZZ-1W62	2*7	12.0	16.0	9.0
WAFER-PHB2.0-16PZZ-1W62	2*8	14.0	18.0	11.0
WAFER-PHB2.0-18PZZ-1W62	2*9	16.0	20.0	13.0
WAFER-PHB2.0-20PZZ-1W62	2*10	18.0	22.0	15.0
WAFER-PHB2.0-22PZZ-1W62	2*11	20.0	24.0	17.0
WAFER-PHB2.0-24PZZ-1W62	2*12	22.0	26.0	19.0
WAFER-PHB2.0-26PZZ-1W62	2*13	24.0	28.0	21.0
WAFER-PHB2.0-28PZZ-1W62	2*14	26.0	30.0	23.0
WAFER-PHB2.0-30PZZ-1W62	2*15	28.0	32.0	25.0
WAFER-PHB2.0-32PZZ-1W62	2*16	30.0	34.0	27.0
WAFER-PHB2.0-34PZZ-1W62	2*17	32.0	36.0	29.0
WAFER-PHB2.0-36PZZ-1W62	2*18	34.0	38.0	31.0
WAFER-PHB2.0-38PZZ-1W62	2*19	36.0	40.0	33.0
WAFER-PHB2.0-40PZZ-1W62	2*20	38.0	42.0	35.0
WAFER-PHB2.0-42PZZ-1W62	2*21	40.0	44.0	37.0
WAFER-PHB2.0-44PZZ-1W62	2*22	42.0	46.0	39.0

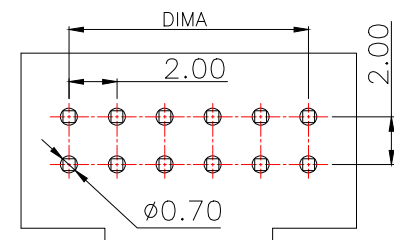

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

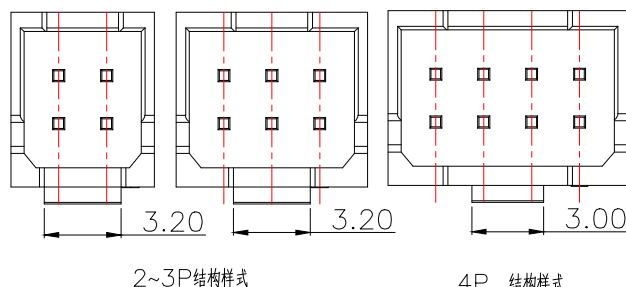

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 工作温度: -25°C~85°C.
3. 额定电压: 250V DC/AC(rms).
4. 额定电流: 3.0A AC,DC.
5. 接触电阻: ≤20mΩ.
6. 耐压值: 800V AC/minute.
7. 绝缘电阻: ≥1000MΩ.

序号	品名	材质
1	2.0A型双排立式WTB嵌芯	PA66 UL94V-0 白色
2	PH2.0直针WTB端子	铜合金/表面镀锡

MANUFACTURE DWG			东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 2.00 Pitch A型双排直插WTB	
DECIMALS:	ANGLES:		PAR	WAFER-PHB2.0-NPZZ-1W62
.X:±0.20	±1°		DWN	
.XX:±0.10			CHKD	
.XXX:±0.05			APVD	
		CUSTOMER COPY	SCALE:1:1	UNIT:MM
			SIZE:A4	SHEET:1F1
				REV:A