



SPECIFICATIONS
 Current Rating:0.75 Amps
 Withstanding Voltage:AC 500V
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Operation Temperature:-40°to+105°
 Insulator Material:Polyester(UL94V-0)
 Contact Material:Phosphor bronze
 Standard:PA6T
 Contact Plating:Gold Flash
 Max.Processing Temp:240°C for30-60seconds
 (260°C for5seconds)


P/N	PIN	DIM.A	DIM.B
FH1.0-03-01PWD	1	0.00	1.00
FH1.0-03-02PWD	2	1.00	2.00
FH1.0-03-03PWD	3	2.00	3.00
FH1.0-03-04PWD	4	3.00	4.00
FH1.0-03-05PWD	5	4.00	5.00
FH1.0-03-06PWD	6	5.00	6.00
FH1.0-03-07PWD	7	6.00	7.00
FH1.0-03-08PWD	8	7.00	8.00
FH1.0-03-09PWD	9	8.00	9.00
.....
FH1.0-03-40PWD	40	(PIN-1)	(PIN)

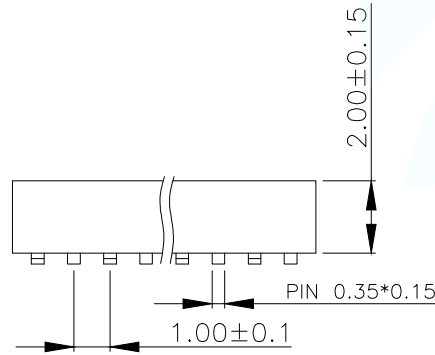

PART NUMBER DESCRIPTION:

FH1.0-03-NPWD

(D=单排;S=双排)
 (Z=直脚;W=弯脚)
 (PIN数量;01.....40PIN)
 (排针开关)

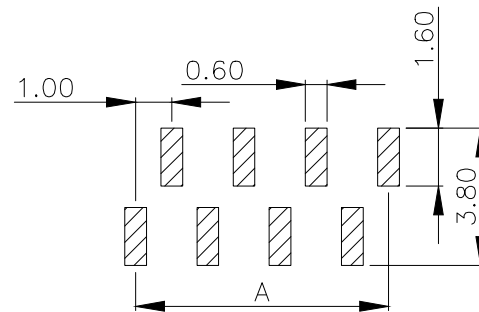

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:1.0FH H2.0 1xnPin SMT W1.5 U型 PC2.8 PB2.3 6T (左前右后)	
DECIMALS:	ANGLES:		PAR FH1.0-03-NPWD	
X.±0.30	X°±5'		DWN	
X.X±0.20	X.X°±1'		CHKD	
X.XX±0.10	X.XX°±0.5'	APVD		
CUSTOMER COPY		SCALE N:A	UNIT:MM	
		SIZE:A4	SHEET:1F1	
			REV:A	