



SPECIFICATIONS

Current Rating: 3Amps
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: AC 1000V
 Operation Temperature: -40°to+105°
 Contact Material: Brass
 Insulator Material: Polyester(UL 94V-0)
 Contact plating: Gold Flash
 Standard: PA6T
 Max.Processing Temp: 240°C for30-60seconds (260°Cfor10seconds)


P/N	PIN	DIM.A	DIM.B
IDC2.54-01-03PZS	2*3	5.08	7.62
IDC2.54-01-04PZS	2*4	7.62	10.16
IDC2.54-01-05PZS	2*5	10.16	12.70
IDC2.54-01-06PZS	2*6	12.70	15.24
IDC2.54-01-07PZS	2*7	15.24	17.78
IDC2.54-01-08PZS	2*8	17.78	20.32
IDC2.54-01-09PZS	2*9	20.32	22.86
IDC2.54-01-10PZS	2*10	22.86	25.40
IDC2.54-01-12PZS	2*12	27.94	30.48
IDC2.54-01-13PZS	2*13	30.48	33.02
IDC2.54-01-14PZS	2*14	33.02	35.56
IDC2.54-01-15PZS	2*15	35.56	38.10
IDC2.54-01-16PZS	2*16	38.10	40.64
IDC2.54-01-17PZS	2*17	40.64	43.18
IDC2.54-01-18PZS	2*18	43.18	45.72
IDC2.54-01-20PZS	2*20	48.26	50.80
IDC2.54-01-22PZS	2*22	53.34	55.88
IDC2.54-01-25PZS	2*25	60.96	63.50
IDC2.54-01-30PZS	2*30	73.66	76.20
IDC2.54-01-32PZS	2*32	78.74	81.28

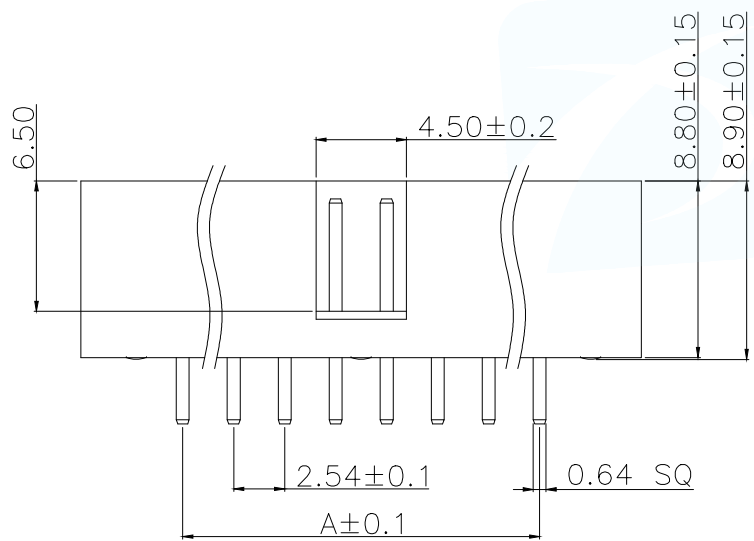

PART NUMBER DESCRIPTION:

IDC2.54-01-NPZS

(D=单排;S=双排)
 (Z=直脚;W=弯脚)
 (PIN数量;06.....64PIN)
 (排针开关)

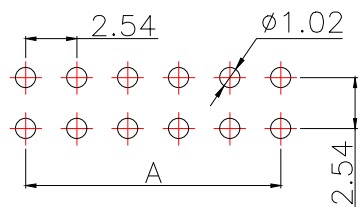

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:2.54DC3-NPIn H8.9 180度 PC3.2 L11.5 6T
DECIMALS:	ANGLES:		PAR IDC2.54-01-NPZS
X.±0.30	X°±5'		DWN
X.X±0.20	X.X°±1'		CHKD
X.XX±0.10	X.XX°±0.5'	APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A