

NOTES

MATERIAL

- 1.HOUSING MATERIAL: THERMO PLASTICS UL94V-0.
- 2.CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING: GOLD PLATING OVER NICKEL.

ELECTRICAL



- 1.VOLTAGE RATING: 125 VAC RMS.
- 2.CURRENT RATING: 1.5 AMP.
- 3.CONTACT RESISTANCE: 40 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE: 500 MEGOHMS MIN @ 100V DC .
- 5.DIELECTRIC DIELECTRIC RESISTANCE: 500V DC RMS 50Hz. 1MIN.

MECHANICAL

- 1.DURRABILITY: 750 CYCLES MIN.
2. MATING/UNMATING FORC: 2.24 KG.F MAX.

ENVIRONMENTAL:

- 1.OPERATION: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 2.STORAGE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

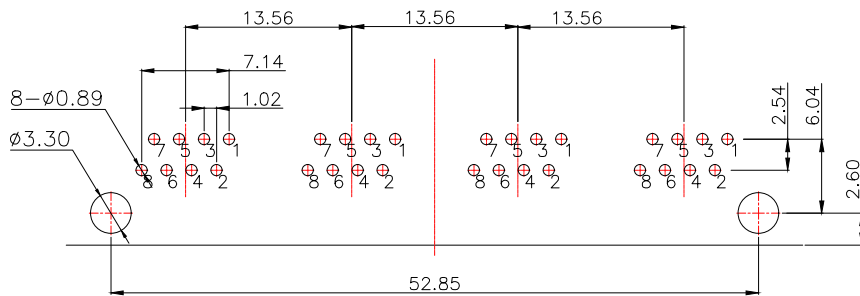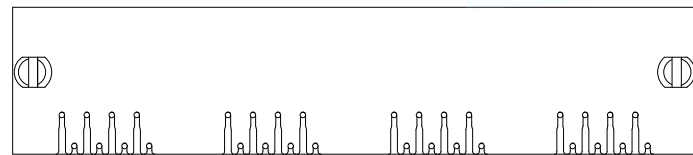

PCB LAYOUT T=1.2
TOP VIEW TOL:±0.05

PART NUMBER DESCRIPTION:

RJ45-542-050-XX

- 流水码 _____
- 1:PBT灰0810盘装
- 2:PA9T灰0811盘装
- 电镀码 _____
- 1-GOLD FLASH

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 5301 1x4 全塑 DIP E款2.2脚
			PAR RJ45-542-050-11
			DWN
			CHKD
DECIMALS: .X:±0.35 .XX:±0.25 .XXX:±0.15	ANGLES: X':±3" .X':±2" .XX':±1"	APVD	SCALE:1:1
		CUSTOMER COPY	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A