
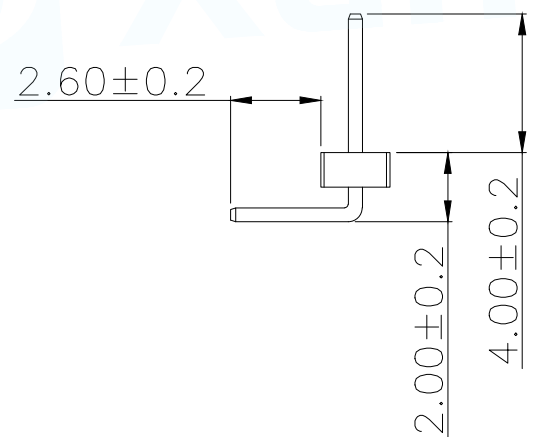


SPECIFICATIONS
 Current Rating:1.0 Amps
 Withstanding Voltage:AC 500V
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Operation Temperature:-40°to+105°
 Insulator Material:Polyester(UL94V-0)
 Contact Material:Brass
 Standard:PA6T
 Contact Plating:Gold Flash
 Max.Processing Temp: 240°C for30-60seconds
 (260°C for5seconds)


P/N	PIN	DIM.A	DIM.B
PH1.27-07-01PWD-PB020	1	0.00	1.27
PH1.27-07-02PWD-PB020	2	1.27	2.54
PH1.27-07-03PWD-PB020	3	2.54	3.81
PH1.27-07-04PWD-PB020	4	3.81	5.08
PH1.27-07-05PWD-PB020	5	5.08	6.35
PH1.27-07-06PWD-PB020	6	6.35	7.62
PH1.27-07-07PWD-PB020	7	7.62	8.89
PH1.27-07-08PWD-PB020	8	8.89	10.16
PH1.27-07-09PWD-PB020	9	10.16	11.43
.....
PH1.27-07-50PWD-PB020	50	(PIN-1)x1.27	(PIN)x1.27

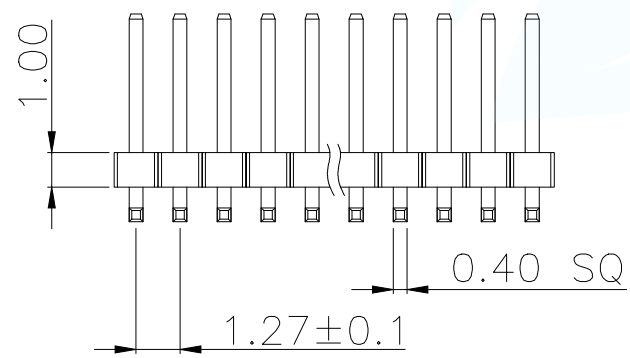

PART NUMBER DESCRIPTION:

PH1.27-07-NPWD

- (D=单排;S=双排)
- (Z=直脚;W=弯脚)
- (PIN数量;01.....40PIN)
- (排针开关)

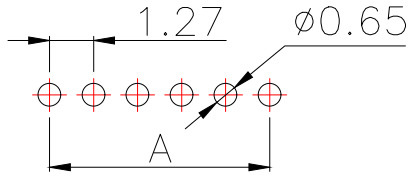

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:1.27PH H1.0 1xnPin 90度 W2.0 PC2.6 PA4.0 PB2.0 L9.2 6T 间距: 0.4寸
DECIMALS:	ANGLES:		PAR PH1.27-07-NPWD-PB020
X.±0.30	X°±5'		DWN
X.X±0.25	X.X'±1'		CHKD
X.XX±0.20	X.XX'±0.5'	APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A