


- MATERIAL:

1. Insulator: PBT+30%Glass Fiber
2. Contact: Brass
3. Contact Plated: Gold Flash over Tin Or Glod Plated Or Tin Plated
4. Shell: Steel, Nickel Plated

= SPECIFICATION:

1. Current Rating: 3 AMPS
2. Insulation Resistance: 100MΩ MIN. At 500VDC
3. Dielectric Strength: 500V for One minute
4. Operation Temperature: -55°C~+105°C.

※【胶芯颜色、防火要求、环保要求及电镀规格 依据客户实际订单要求为准】

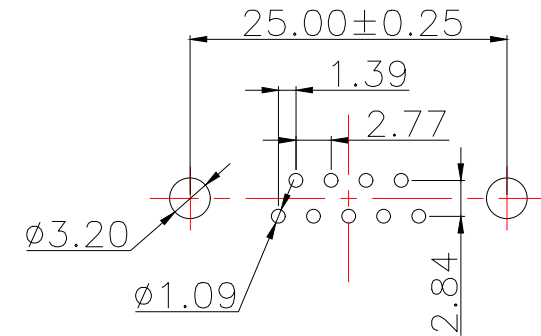

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: DP-9M 继电器
			PAR D-SUB-DP-9PHG-AB
			DWN Lucas
			CHKD Ethan
DECIMALS:	ANGLES:	APVD Jacob	SCALE 1:1
.X:±0.30	.X':±1°	SCALE 1:1	UNIT:MM
.XX:±0.25	.XX':±0.5°	SIZE:A4	REV:A
.XXX:±0.05	.XXX':±0.1°	SHEET:1F1	