
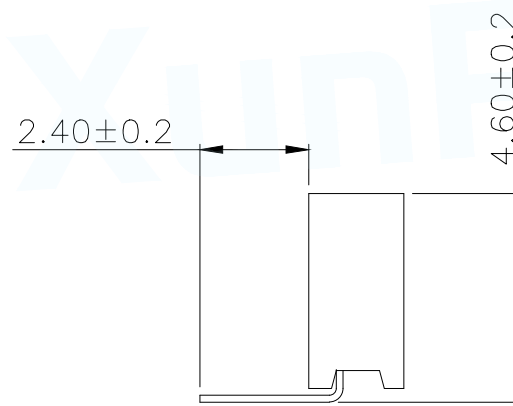


**SPECIFICATIONS**  
 Current Rating: 1.0 Amps  
 Withstanding Voltage: AC 500V  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Operation Temperature: -40° to +105°  
 Insulator Material: Polyester (UL94V-0)  
 Contact Material: Phosphor bronze  
 Standard: PA6T  
 Contact Plating: Gold Flash  
 Max. Processing Temp: 240°C for 30-60 seconds  
 (260°C for 5 seconds)


P/N	PIN	DIM.A	DIM.B
FH1.27-05-01PWD	1	0.00	1.27
FH1.27-05-02PWD	2	1.27	2.54
FH1.27-05-03PWD	3	2.54	3.81
FH1.27-05-04PWD	4	3.81	5.08
FH1.27-05-05PWD	5	5.08	6.35
FH1.27-05-06PWD	6	6.35	7.62
FH1.27-05-07PWD	7	7.62	8.89
FH1.27-05-08PWD	8	8.89	10.16
FH1.27-05-09PWD	9	10.16	11.43
.....	.....	.....	.....
FH1.27-05-50PWD	50	(PIN-1)x1.27	(PIN)x1.27

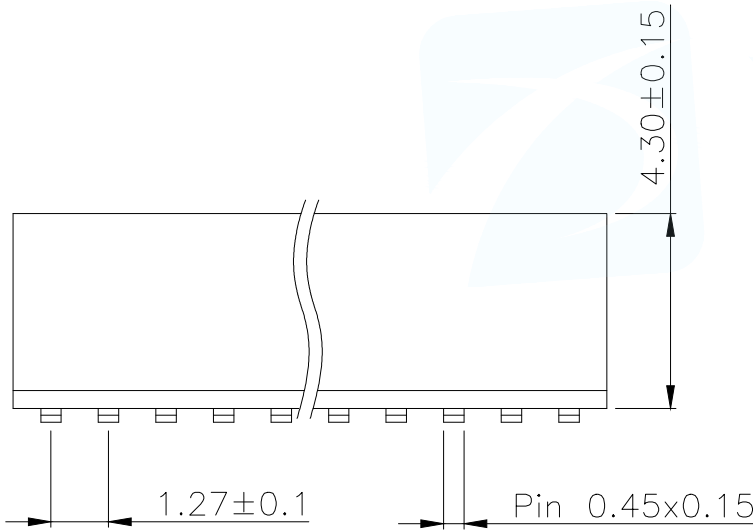

PART NUMBER DESCRIPTION:

FH1.27-05-NPWD

(D=单排; S=双排)  
 (Z=直脚; W=弯脚)  
 (PIN数量; 01.....50PIN)  
 (排针开关)

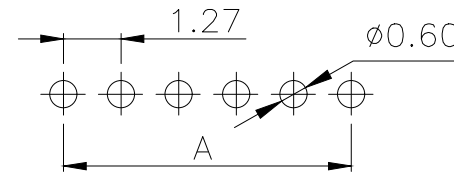

RECOMMEND P.C.B LAYOUT  
 PCB TOLERANCE: ±0.05 (TOP VIEW)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.27FH H4.3 1xnPin 90度 W2.1 U型 PC2.4 PB4.6 6T	
DECIMALS:	ANGLES:		PAR FH1.27-05-NPWD	
X.±0.30	X°±5'		DWN	
X.X±0.20	X.X'±1"		CHKD	
X.XX±0.10	X.XX'±0.5"	APVD		
CUSTOMER COPY		SCALE N:A	UNIT:MM	
		SIZE:A4	SHEET:1F1	
			REV:A	