

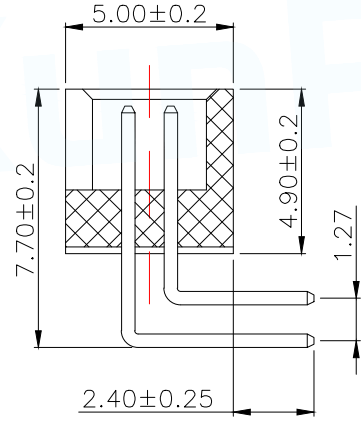


SPECIFICATIONS
 Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Brass
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)

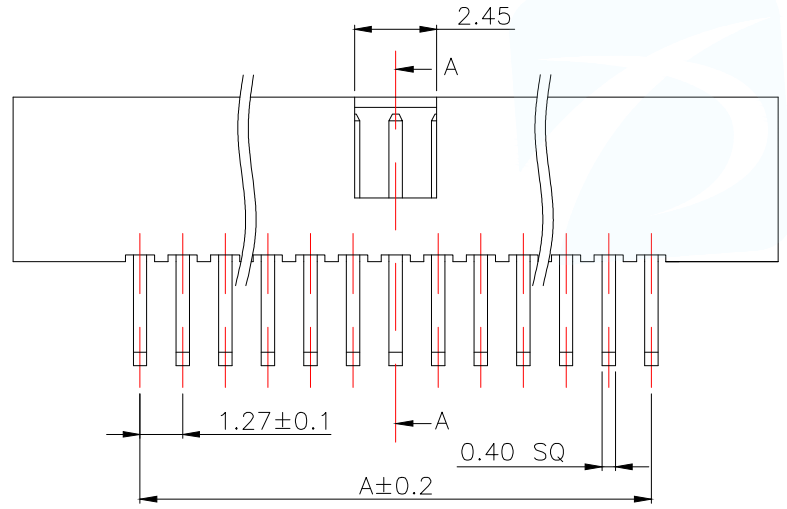

A-A SECTION



RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
IDC1.27-05-03PWS-PC023	2*3	2.54	3.81
IDC1.27-05-04PWS-PC023	2*4	3.81	5.08
IDC1.27-05-05PWS-PC023	2*5	5.08	6.35
IDC1.27-05-06PWS-PC023	2*6	6.35	7.62
IDC1.27-05-07PWS-PC023	2*7	7.62	8.89
IDC1.27-05-08PWS-PC023	2*8	8.89	10.16
IDC1.27-05-10PWS-PC023	2*10	11.43	12.70
IDC1.27-05-12PWS-PC023	2*12	13.97	15.24
IDC1.27-05-13PWS-PC023	2*13	15.24	16.51
IDC1.27-05-15PWS-PC023	2*15	17.78	19.05
IDC1.27-05-17PWS-PC023	2*17	20.32	21.59
IDC1.27-05-20PWS-PC023	2*20	24.13	25.40
IDC1.27-05-22PWS-PC023	2*22	26.67	27.94
IDC1.27-05-25PWS-PC023	2*25	30.48	31.75
IDC1.27-05-30PWS-PC023	2*30	36.83	38.10

PART NUMBER DESCRIPTION:

IDC1.27-05-NPWS

(D=单排; S=双排)
 (Z=直脚; W=弯脚)
 (PIN数量; 06.....60PIN)
 (排针开关)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.27DC3-nPin H4.9 90度 PC2.4 PB7.7 L9.5/12.0 6T
DECIMALS:	ANGLES:		PAR IDC1.27-05-NPWS-PC023 DWN CHKD APVD
X.±0.30	X°±5'		SCALE: N/A UNIT: MM SIZE: A4 SHEET: 1F1
X.X±0.20	X.X°±1'		CUSTOMER COPY REV: A
X.XX±0.10	X.XX°±0.5'		