

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating:1.5A/contact terminal
2. 额定电压: Voltage Rating:30V DC
3. 接触阻抗: Contact Resistance:30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance: 1000MEGA ohms MIN

物理性能:Mechanical:



1. 插拔力: Connector Mate and Unmate Force:
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention:1.2kgf(MIN)

原材料:Material:

1. 塑胶:Housing:High Temperature Thermoplastics, UI 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area; Tin On Solder Tails
2. 外壳:Shell:Nickel Plating

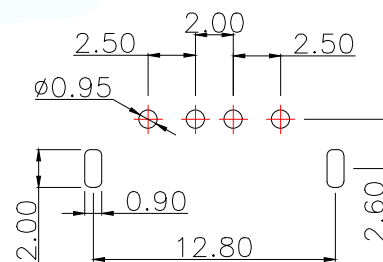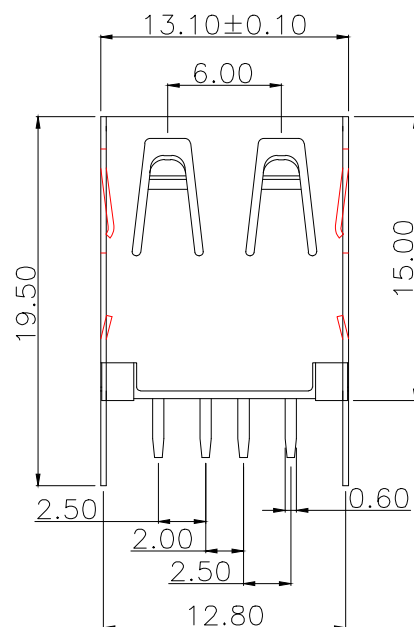

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: AF 180度 15.0 直脚平口	
		PAR	USB-256-BRWH150
DECIMALS:	ANGLES:	DWN	Lucas
.X:±0.30	X.:±5°	CHKD	Ethan
.XX:±0.20	X.X':±2°	APVD	Jacob
.XXX:±0.10		SCALE:1:1	UNIT:MM
		CUSTOMER COPY	SIZE:A4
			SHEET:1F1
			REV:A