
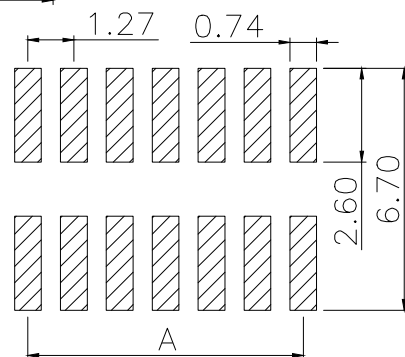
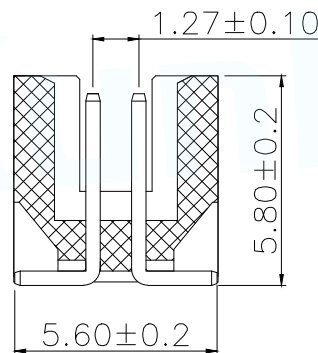


SPECIFICATIONS

Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Brass
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)


P/N	PIN	DIM.A	DIM.B
IDC1.27-02-03PWS	2*3	2.54	3.81
IDC1.27-02-04PWS	2*4	3.81	5.08
IDC1.27-02-05PWS	2*5	5.08	6.35
IDC1.27-02-06PWS	2*6	6.35	7.62
IDC1.27-02-07PWS	2*7	7.62	8.89
IDC1.27-02-08PWS	2*8	8.89	10.16
IDC1.27-02-10PWS	2*10	11.43	12.70
IDC1.27-02-12PWS	2*12	13.97	15.24
IDC1.27-02-13PWS	2*13	15.24	16.51
IDC1.27-02-15PWS	2*15	17.78	19.05
IDC1.27-02-17PWS	2*17	20.32	21.59
IDC1.27-02-20PWS	2*20	24.13	25.40
IDC1.27-02-22PWS	2*22	26.67	27.94
IDC1.27-02-25PWS	2*25	30.48	31.75
IDC1.27-02-30PWS	2*30	36.83	38.10

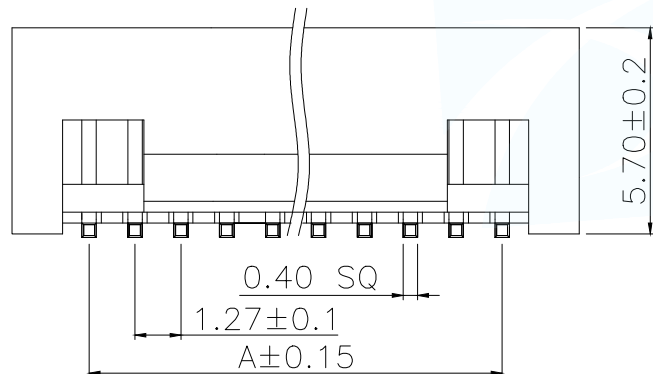

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:

IDC1.27-02-NPWS

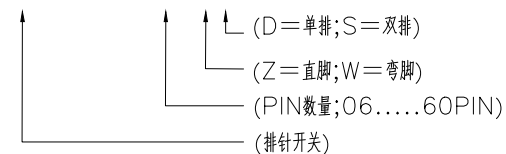

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.27DC3-nPin H5.7 90度 PC2.3 PB8.2 L10.5/13.0 6T	
DECIMALS:	ANGLES:		PAR IDC1.27-02-NPWS	
X.±0.30	X°±5'		DWN	
X.X±0.20	X.X°±1'		CHKD	
X.XX±0.10	X.XX°±0.5'	APVD		
CUSTOMER COPY		SCALE N:A	UNIT:MM	
		SIZE:A4	SHEET:1F1	
			REV:A	