


3D View

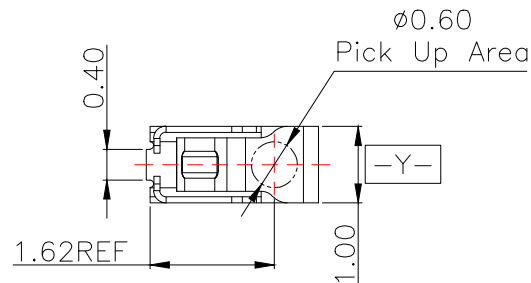

NOTES:

1: MATERIAL

1-1: SUS-301 THICKNE=0.08MM

2: SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.5V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C



3: DURABILITY: 1500 CYCLES

4: SALT SPRAY TIME: 24H





5: ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6: REQUIREMENTS

- 6-1: TERMINAL TO EAT FULL TIN, NOT PEELING, WELDING OBVIOUS COLOR AND OTHER ADVERSE
- 6-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

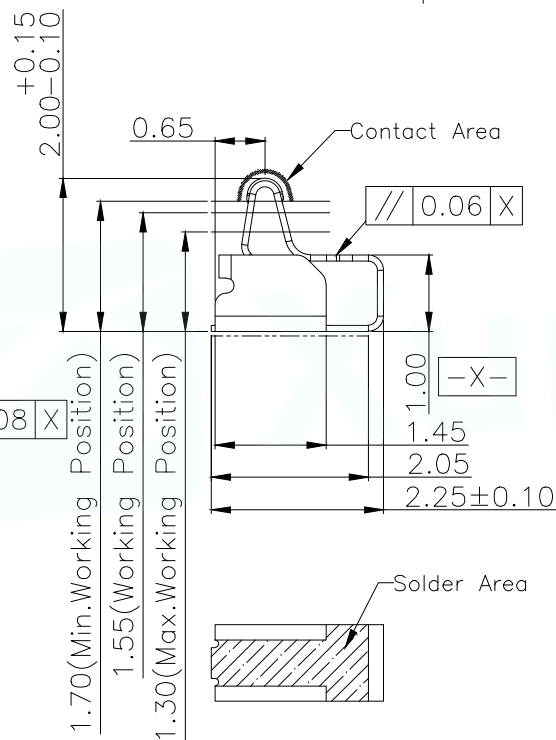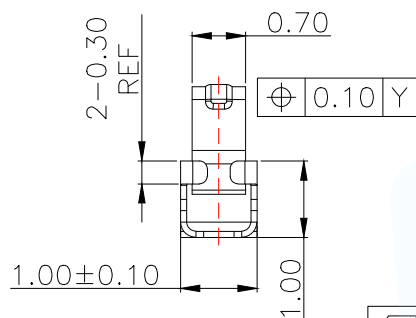


0.08 X

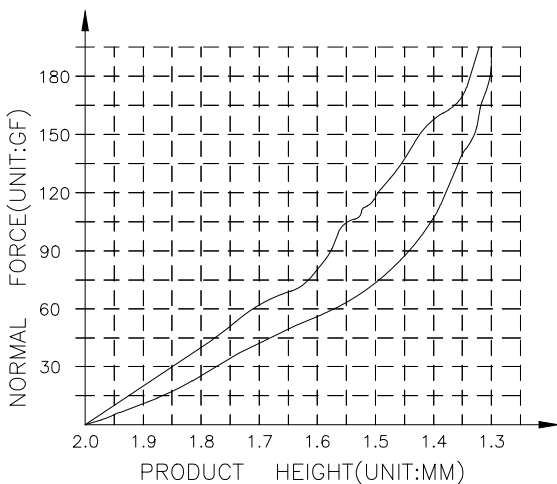

RECOMMENDED PCB LAYOUT


TOLERANCE: ±0.05MM
(FOR REFERENCE ONLY)

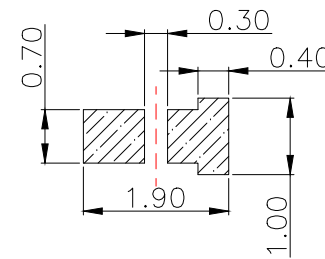

METAL MASK T=0.08

TOLERANCE: ±0.05MM
(FOR REFERENCE ONLY)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 天线弹片 L2.25*W1.00*H2.00
DECIMALS:	ANGLES:		PAR ASP-D2002-B01
X. ±0.30	X. ° ±0.20		DWN
.X ±0.20	.X ° ±0.10		CHKD
.XX ±0.15	.XX ° ±0.5	APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1
			REV:A

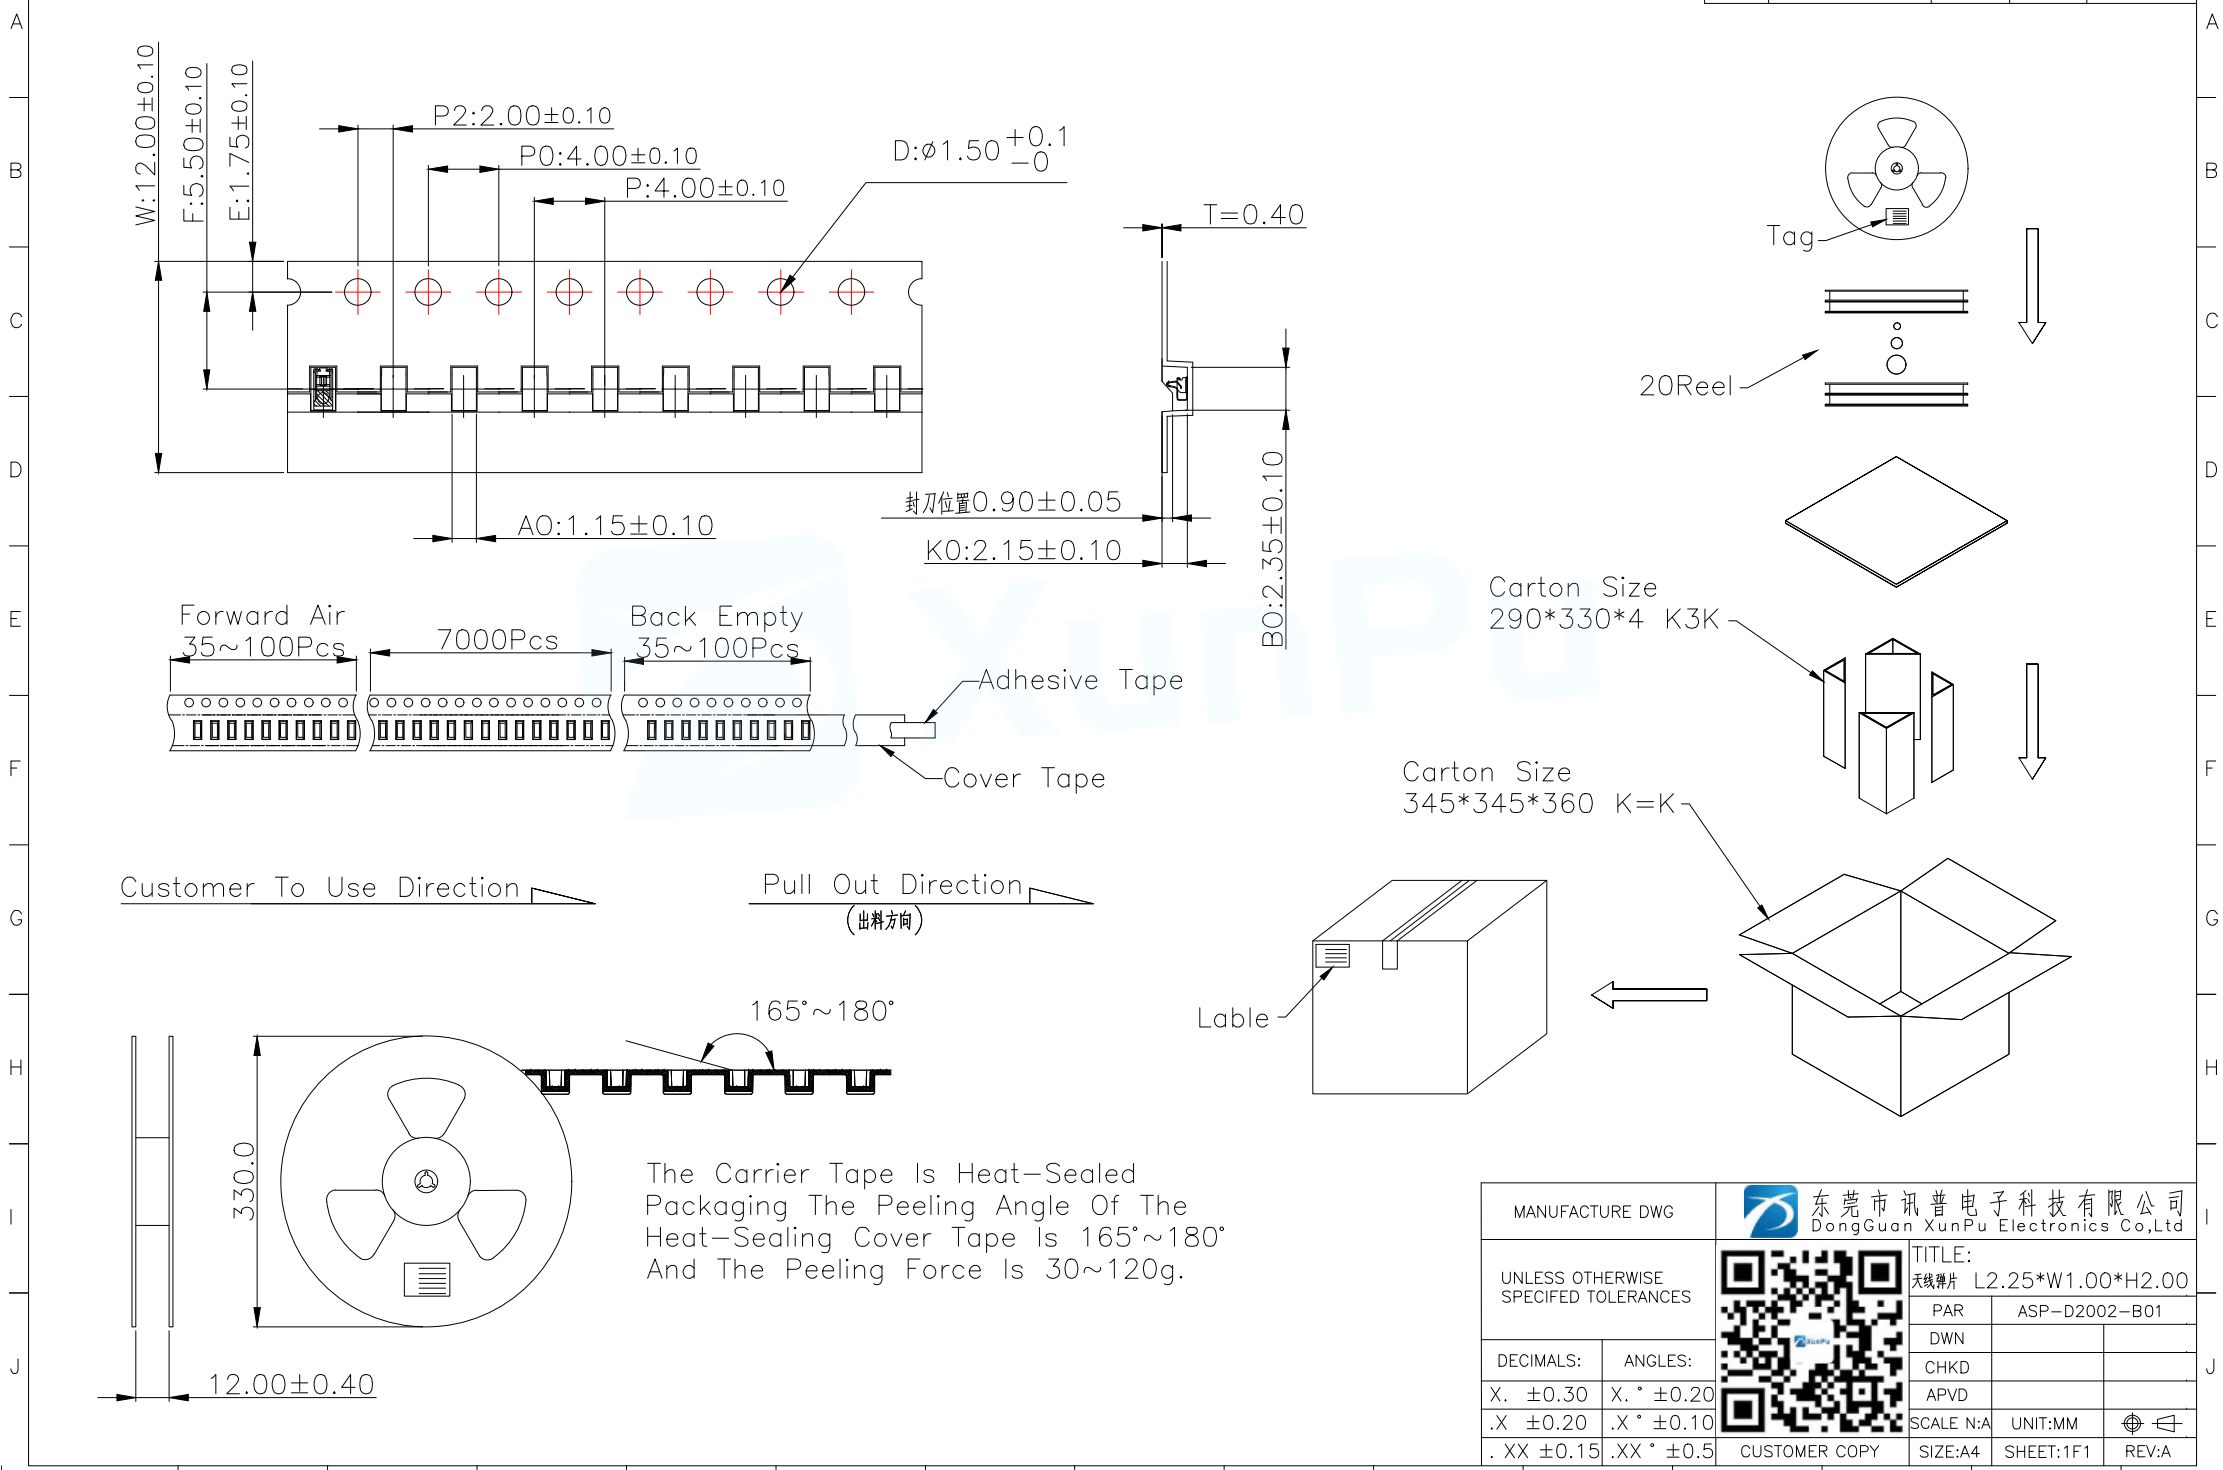

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 天线弹片 L2.25*W1.00*H2.00
			PAR ASP-D2002-B01
DECIMALS:	ANGLES:		DWN
X. ±0.30	X. ° ±0.20		CHKD
.X ±0.20	.X ° ±0.10	APVD	
.XX ±0.15	.XX ° ±0.5	SCALE N:A	UNIT:MM
		SIZE:A4	SHEET:1F1
		CUSTOMER COPY	REV:A