


12	13	14	15
MAPX	MODIFICATION	DATE	DRAW APPROVE

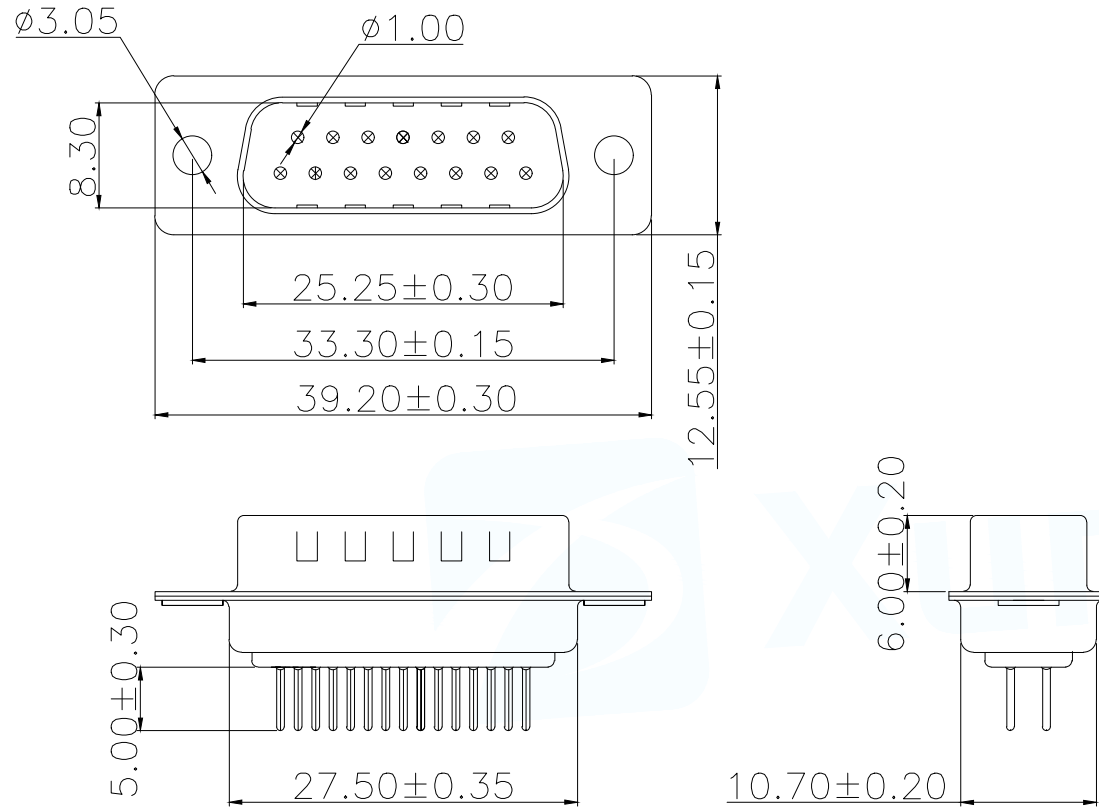


-, MATERIAL:

- 1.Insulator:PBT+30%Glass Fiber
- 2.Contact:Brass
- 3.Contact Plated:Gold Flash over Tin Or Glod Plated Or Tin Plated
- 4.Shell:Steel,Nickel Plated

二、SPECIFICATION:

- 1.Current Rating:3 AMPS
- 2.Insulation Resistance: 100MΩ MIN. At 500VDC
- 3.Dielectric Strength: 500V for One minute
- 4.Operation Temperature: -55° C~+105° C.

*【胶芯颜色、防火要求、环保要求及电镀规格 依据客户实际订单要求为准】

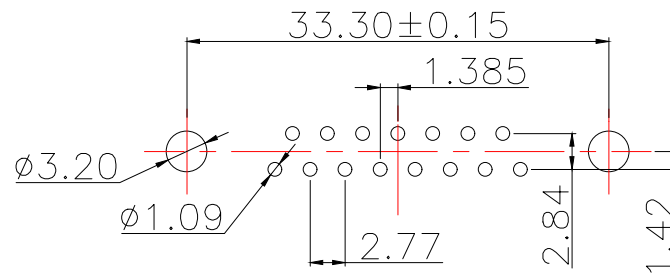

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: DP-15M 15Pin
			PAR D-SUB-DP-15PHG-AB
			DWN Lucas
			CHKD Ethan
DECIMALS:	ANGLES:	APVD Jacob	SCALE 1:1
.X:±0.30	.X':±1°	UNIT:MM	UNIT:MM
.XX:±0.25	.XX':±0.5°	SIZE:A4	SIZE:A4
.XXX:±0.05	.XXX':±0.1°	SHEET:1F1	SHEET:1F1
CUSTOMER COPY		REV:A	REV:A