
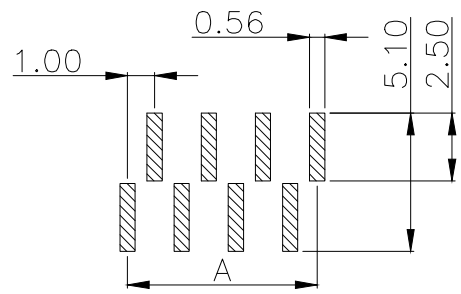
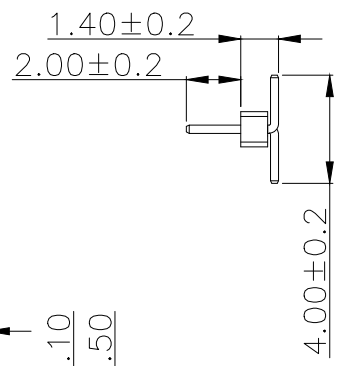


SPECIFICATIONS
 Current Rating:0.75 Amps
 Withstanding Voltage:AC 500V
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Operation Temperature:-40°to+105°
 Insrlator Material:Polyester(UL94V-0)
 Contact Material:Phosphor bronze
 Standard:PA6T
 Contact Plating:Gold Flash
 Max.Processing Temp:240°C for30-60seconds
 (260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
PH1.0-03-01PWD	1	0.00	1.0
PH1.0-03-02PWD	2	1.0	2.00
PH1.0-03-03PWD	3	2.00	3.00
PH1.0-03-04PWD	4	3.00	4.00
PH1.0-03-05PWD	5	4.00	5.00
PH1.0-03-06PWD	6	5.00	6.00
PH1.0-03-07PWD	7	6.00	7.00
PH1.0-03-08PWD	8	7.00	8.00
PH1.0-03-09PWD	9	8.00	9.00
.....
PH1.0-03-40PWD	40	(PIN-1)	(PIN)



RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:
 PH1.0-03-NPWD
 (D=单排;S=双排)
 (Z=直脚;W=弯脚)
 (PIN数量;01.....40PIN)
 (排针开关)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:1.0PH H1.0 1xnPin SMT W1.3 PC4.0 PA2.0 PB1.4 L5.0 6T(左前右前)
DECIMALS:	ANGLES:		PAR PH1.0-03-NPWD
X.±0.30	X°±5'		DWN
X.X±0.20	X.X'±1"		CHKD
X.XX±0.10	X.XX'±0.5"	APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	UNIT:MM SHEET:1F1 REV:A