
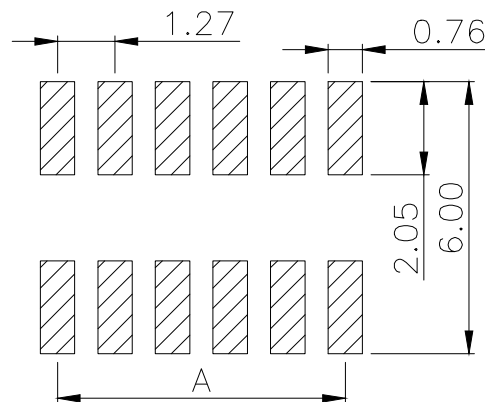



SPECIFICATIONS
 Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Phosphor bronze
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)

P/N	PIN	DIM.A	DIM.B
FH1.27-02-01PWS	2*1	0.00	1.27
FH1.27-02-02PWS	2*2	1.27	2.54
FH1.27-02-03PWS	2*3	2.54	3.81
FH1.27-02-04PWS	2*4	3.81	5.08
FH1.27-02-05PWS	2*5	5.08	6.35
FH1.27-02-06PWS	2*6	6.35	7.62
FH1.27-02-07PWS	2*7	7.62	8.89
FH1.27-02-08PWS	2*8	8.89	10.16
FH1.27-02-09PWS	2*9	10.16	11.43
.....
FH1.27-02-50PWS	2*50	(PIN-1)x1.27	(PIN)x1.27

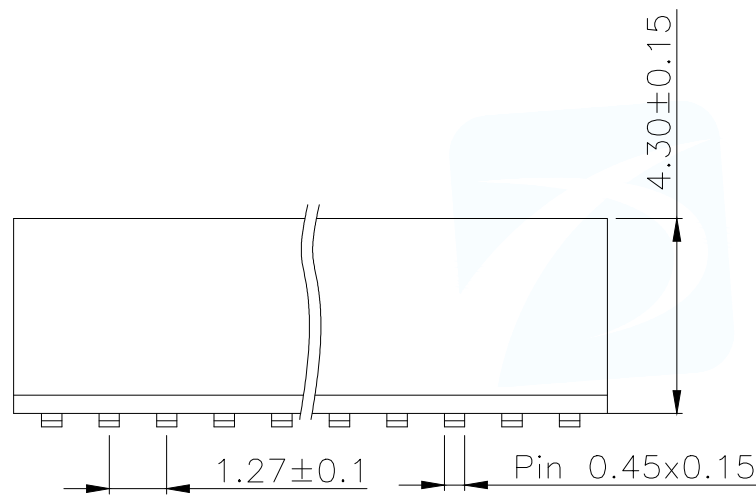

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:

FH1.27-02-NPWS

(D=单排; S=双排)
 (Z=直脚; W=弯脚)
 (PIN数量; 01.....50PIN)
 (排针开关)

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.27FH H4.3 2xNPIN SMT U型 PC4.8 PB4.6 6T	
DECIMALS:	ANGLES:		PAR	FH1.27-02-NPWS
X.±0.30	X°±5'		DWN	
X.X±0.20	X.X°±1'		CHKD	
X.XX±0.10	X.XX°±0.5'	APVD		
CUSTOMER COPY		SCALE N:A	UNIT:MM	
		SIZE:A4	SHEET:1F1	
			REV:A	