
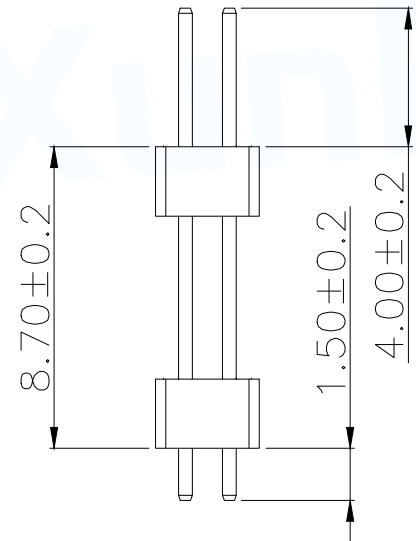


SPECIFICATIONS
 Current Rating:1.0 Amps
 Withstanding Voltage:AC 500V
 Insulation Resistance:1000MQ Min
 Contact Resistance:20mΩ Max
 Operation Temperature:-40°to+105°
 Insrlator Material:Polyester(UL94V-0)
 Contact Material:Brass
 Standard:PA6T
 Contact Plating:Gold Flash
 Max.Processing Temp: 240°C for30-60seconds
 (260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
PH1.27-15-01PZS-PC015	2*1	0.00	1.27
PH1.27-15-02PZS-PC015	2*2	1.27	2.54
PH1.27-15-03PZS-PC015	2*3	2.54	3.81
PH1.27-15-04PZS-PC015	2*4	3.81	5.08
PH1.27-15-05PZS-PC015	2*5	5.08	6.35
PH1.27-15-06PZS-PC015	2*6	6.35	7.62
PH1.27-15-07PZS-PC015	2*7	7.62	8.89
PH1.27-15-08PZS-PC015	2*8	8.89	10.16
PH1.27-15-09PZS-PC015	2*9	10.16	11.43
.....
PH1.27-15-50PZS-PC015	2*50	(PIN-1)x1.27	(PIN)x1.27

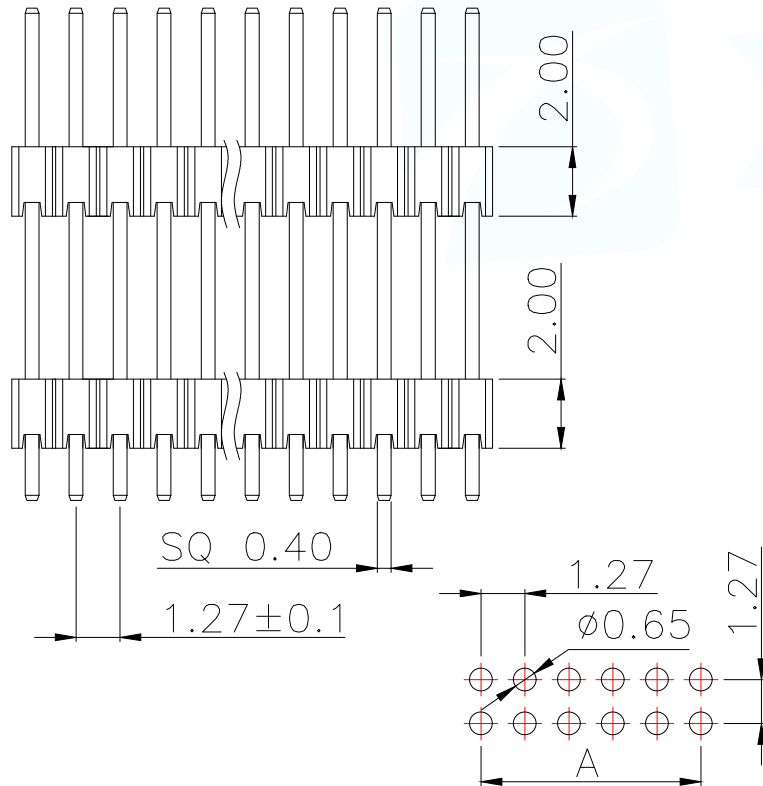

PART NUMBER DESCRIPTION:

PH1.27-15-NPZS

- (D=单排;S=双排)
- (Z=直脚;W=弯脚)
- (PIN数量;01.....50PIN)
- (排针开关)

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:1.27PH H2.0 2xnPin 180度 W3.0 PC1.5 PA4.0 PB8.7 L15.0 6T 双排
DECIMALS:	ANGLES:		PAR PH1.27-15-NPZS-PC015 DWN CHKD APVD
X.±0.30	X°±5'		SCALE N:A
X.X±0.20	X.X°±1'		UNIT:MM
X.XX±0.10	X.XX°±0.5'	CUSTOMER COPY	SIZE:A4 SHEET:1F1 REV:A