

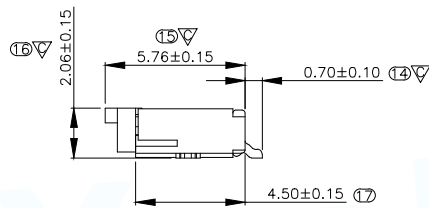
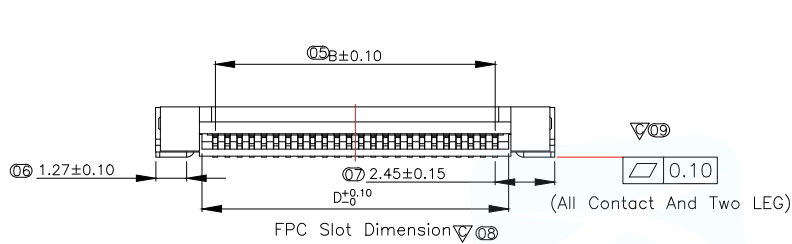

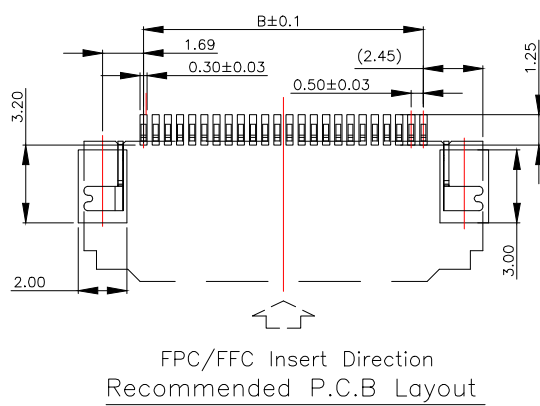


Note:
 1.Material
 1.1: Housing: LCP UL94-V0 Color:Black.
 1.2: Actuator: LCP UL94-V0 Color:Black.
 1.3: Contact: Phosphor Bronze.
 1.4: LEG: Brass.
 2.Plating
 2.1: Contact: Matte Tin Or Gold Plating
 Nickel Overall .
 2.2: LEG: Matte Tin Plating Over Nickel.
 3.Rating:
 3.1: Operating Voltage: 50V AC/DC.
 3.2: Current Rating: 0.4A AC/DC.
 3.3: Operating Temperature:-25°C~+85°C.

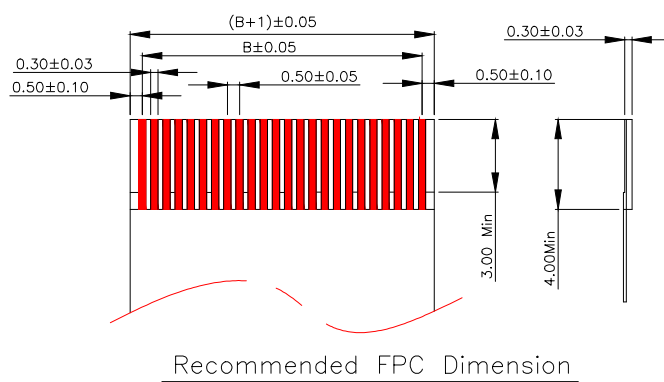


Part No	Pin	A	B	C	D
FPC-0.5FX-S-04PWBH20	4	6.40	1.50	6.00	2.50
FPC-0.5FX-S-05PWBH20	5	6.90	2.00	6.5	3.00
FPC-0.5FX-S-06PWBH20	6	7.40	2.50	7.00	3.50
FPC-0.5FX-S-07PWBH20	7	7.90	3.00	7.50	4.00
FPC-0.5FX-S-08PWBH20	8	8.40	3.50	8.00	4.50
FPC-0.5FX-S-09PWBH20	9	8.90	4.00	8.50	5.00
FPC-0.5FX-S-10PWBH20	10	9.40	4.50	9.00	5.50
FPC-0.5FX-S-11PWBH20	11	9.90	5.00	9.50	6.00
FPC-0.5FX-S-12PWBH20	12	10.40	5.50	10.00	6.50
FPC-0.5FX-S-13PWBH20	13	10.90	6.00	10.50	7.00
.....
FPC-0.5FX-S-80PWBH20	80	(PIN-4)*0.5 +6.4	(PIN-4)*0.5 +1.5	(PIN-4)*0.5 +6.0	(PIN-4)*0.5 +2.5




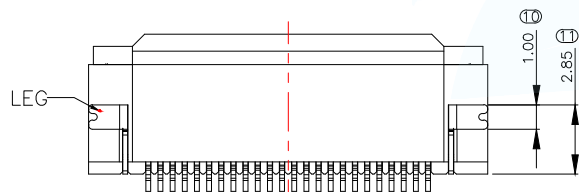


Section A-A
Scale 2:1

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:FPC 0.5Pitch 2.0H ZIF 兼 盖式 connector.
DECIMALS:	ANGLES:		PAR FPC-0.5FX-S-NPWBH20
.X:±0.30	.X':±5°		DWN
.XX:±0.20	.XX':±3°		CHKD
.XXX:±0.10	.XXX':±1°	APVD	SCALE:1:1 UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1 REV:A

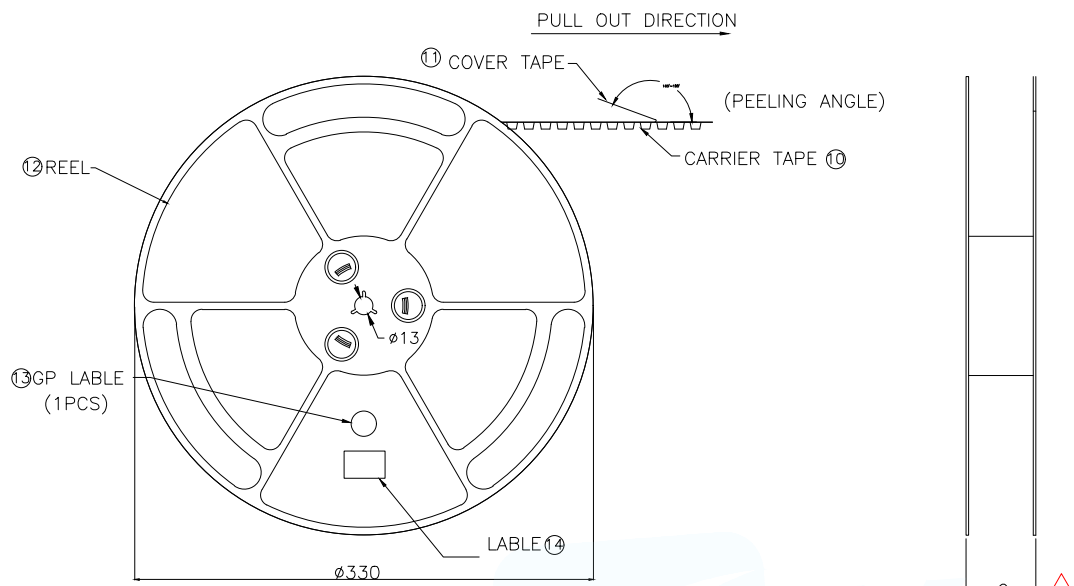

Scale 1:4

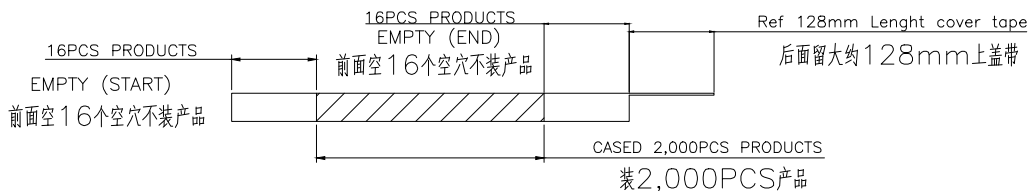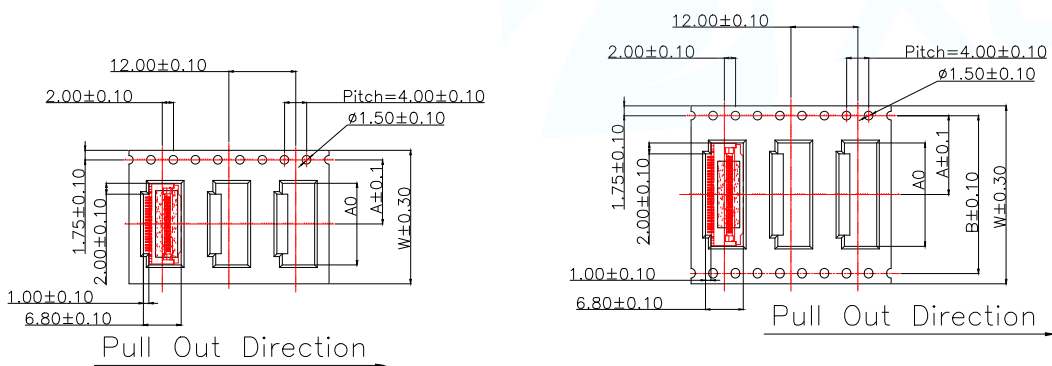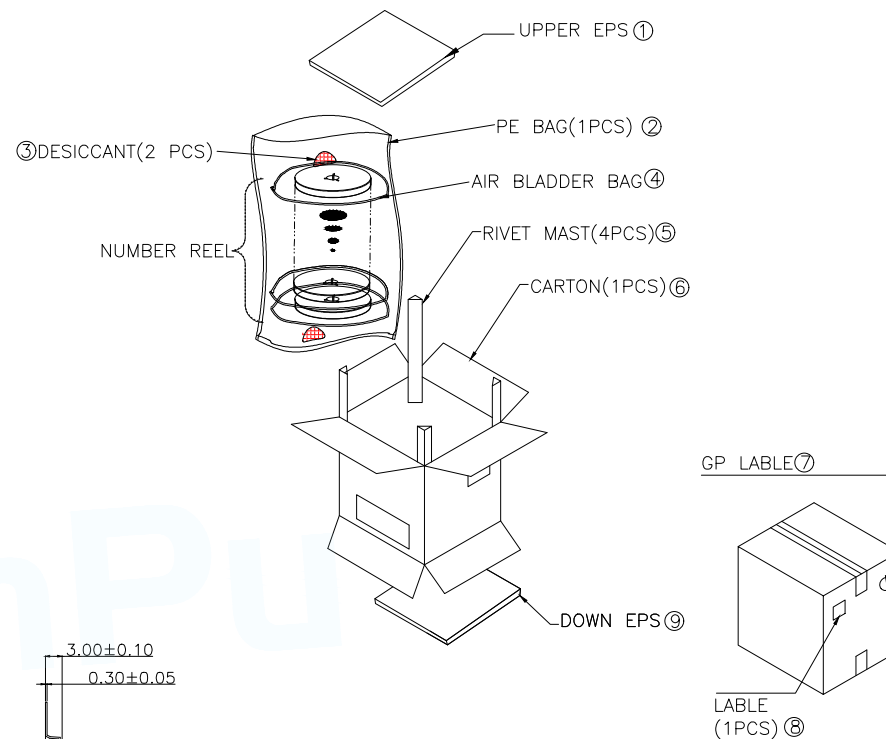

- NOTES :
- 1.CARTON SPEC. :350 *350 *340mm(OUT DIM) , PAPPER THICKNESS =5mm
 - 2.UPPER and DOWN EPS: 350*350mm THICKNESS =8mm.
 - 3.THE COVER TAPE PEELING FORCE:30~100g.
 - 4.PER REEL CASED ONE AIR BLADDER BAG.
 - 5.CARRIER TAPE COLOR:BLACK.

PIN NO.	C	W	A	B	A0	PCS/Reel	Reel/Carton	Sum(PCS)
04PIN~9PIN	20.5	16	7.50	-	-	2,000	15	30,000
10PIN~25PIN	28.5	24	11.5	-	6.60+	2,000	10	20,000
26PIN~35PIN	36.5	32	14.2	28.4	(n-4)*0.5	2,000	8	16,000
36PIN~56PIN	48.5	44	20.2	40.4	(n=pin no)	2,000	6	12,000
57PIN~80PIN	60.5	56	26.2	52.4		2,000	5	10,000

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:FPC 0.5Pitch 2.0H ZIF 封装 Packing
			PAR FPC-0.5FX-S-NPWBH20
DECIMALS:	ANGLES:		DWN
.X:±0.30	.X':±5°		CHKD
.XX:±0.20	.XX':±3°	APVD	SCALE1:1
.XXX:±0.10	.XXX':±1°	CUSTOMER COPY	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A